卷册检索号 SEARCH NO. OF THE VOLUME
MLHVDC-LCS-ECI-DD-CS-0608 30-B003701S-T0608

图纸文件目录（首页）

CATALOG OF DRAWING DOCUMENTS (HEAD PAGE)

拉合尔±660kV换流站 工程 施工图 阶段
±660kV Lahore Converter Station PROJECT Detail Design DESIGN STAGE

结构 专业 第 06 卷 第 08 册
Structure SPECIALITY VOLUME BOOK

卷册 名称 #3继电器室桩位图
Volume name pile for No.3 relay room

批 准 APPROVED BY	
审 核 REVIEWED BY	
设计/勘测 DESIGNED BY/ SURVEYED BY	
图纸 1 张 DRAWING NOS.	打印件 0 本 PRINTED COPIES NOS.

序号 No.	图 号 DRAWING NO.	文件名称 DOCUMENT TITLE	版本 EDITION	张 NOS.	本 NOS.	备注 REMARKS
1	30-B003701S-T0608-001	#3继电器室桩位平面布置图 Plan layout of pile for No.3 relay room	A	1		

注:

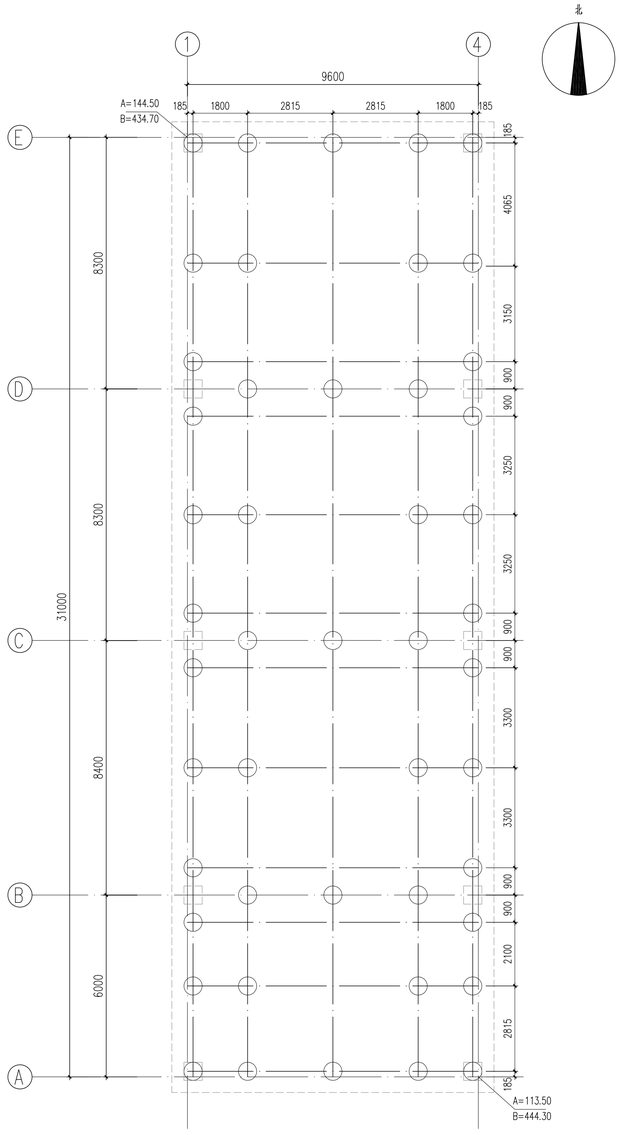

#3继电器室桩位平面布置图

Plan layout of pile for No.3 relay room

说明：

1、室内±0.000相当于绝对标高193.85(EGM2008高程系统)。如无特别说明，本工程标高均采用相对标高。
2、本工程基础采用柱下承台+灌注桩的形式，桩为Φ600的机械成孔灌注桩，
〇表示承压工程桩-(YZ01)，为Φ600机械成孔灌注桩，桩长16米，桩顶标高为-1.600m(除注明外)，
桩身砼强度fc'=28Mpa，桩端持力层为②3层中密的粉细砂层；单桩承压承载力设计值为420kN。共47根。
3、对施工的要求：
3.1.机械成孔灌注桩施工要求详见30-B003701S-T0609-001。
3.2.施工单位在确定沉桩时，所选用的施工设备，应确保桩位的准确，确保桩身质量的完整，并护好周围道路及环境；施工中发现贯入度异常或与勘察资料土质不符，及时通知设计人员现场研究解决。
4、本项目桩基设计等级为丙级。
5、桩基在施工过程中，除满足本说明的要求外，应严格执行《Design,Manufacture, and Installation of concrete piles》(ACI 543R-12)的相关规定。
6、桩基钢筋防腐应控制混凝土配料中所含可溶氯离子浓度最大含量不超过0.1%控制，测试方法参《ASTM C 1218M》。
7、未注明桩定位均关于轴线对中。
8、本工程初设设计尚未审定，未通过NTDC审核，桩基存在修改的可能，施工前请联系业主与设计确认。

Specification:

1. The indoor elevation of ±0.000 is equal to the absolute elevation of193.85 (geodestic datum system EGM2008) If not specified,the elevations of the project are adopt to the relative elevation.
2、The foundation of this project adopts the form of independent cap and filling pile under column. The pile is a bored cast-in-place pile with a diameter of 600.
〇stands for the bearing engineering pile(YZ01).The length of the pile is 16 meters.The elevation of pile top is -1.600m (except indicated). The concrete strength of the pile body fc' is 28MPa. The bearing stratum at the tip of piles are 2 to 3 layers of moderately dense fine sand. The design value of bearing capacity of single pile is 420kN. The number of the piles is 47.
3、Requirements for construction:
3.1.Requirements for construction of mechanical bored piles are detailed in 30-B003701S-T0609-001.
3.2.The construction equipments used by the construction unit in determining the pile shall ensure the accuracy of the pile location, the integrity of the pile quality, and the protection of the surrounding roads and environment;
4、Design class of foundation is class C.
5、In addition to meeting the requirements of the specification, the relevant regulations in《Design,Manufacture and Installation of concrete piles》(ACI 543R-12) should be strictly enforced. ,
6、The concentration of soluble chloride ion in concrete burden shall be controlled.The maximum content shall not be more than0.1%. Test method refers to "ASTM C 1218M".
7、Undated piles are symmetric on the axis.
8.The initial design of the project has not yet been approved by NTDC, the pile foundation is possible to amend.Please contact the owner and designer before construction.

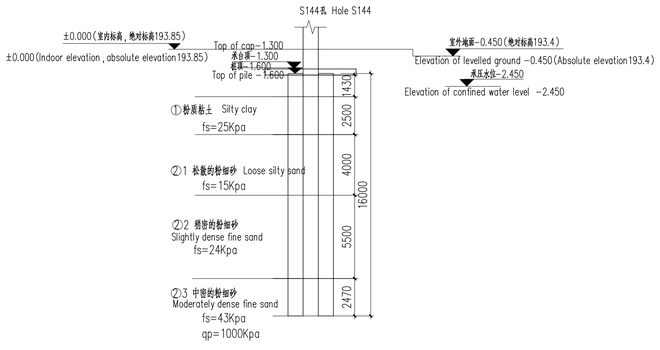

地质剖面示意图一

geological constructed profile 1

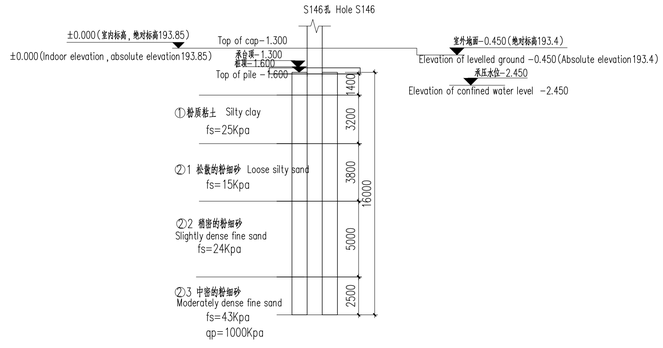

地质剖面示意图二

geological constructed profile 2

Reference Drawings

Drwg. No.	Title

Revisions

	Name	Date	Notes

巴基斯坦默蒂亚里—拉合尔±660kV直流输电工程

±660kV HVDC Project from Matiari to Lahore in Pakistan

NATIONAL TRANSMISSION & DESPATCH COMPANY (NTDC) LIMITED PAKISTAN

CONTRACTOR 国家电网 STATE GRID 中国电力技术装备有限公司 CHINA ELECTRIC POWER EQUIPMENT AND ENGINEERING CO.,LTD.

SUBCONTRACTOR East China Electric Power Design Institute Co.,Ltd.

拉合尔±660kV换流站

±660kV Lahore Converter Station

设计阶段 PHASE: 施工图 Detail Design

M L H V D C - L C S - E C I - D D - C S - 0 6 0 8 - 0 0 1 A

	姓名 Name	日期 Date
设计 Designed	邹清清	
校核 Checked	周峰	
审核 Reviewed	陈忠伟	
批准 Approved	杨亚	

#3继电器室桩位平面布置图

Plan layout of pile for No.3 relay room

比例 Scale:

图号 DWG NO.: 30-B003701S-T0608-001

版本 REV: A

594X841