卷册检索号 SEARCH NO. OF THE VOLUME
MLHVDC-LCS-CET-DD-GL-0102 49-B60011S-Z0102

第 1 页 共 1 页
PAGE OF

图纸文件目录（首页）

CATALOG OF DRAWING DOCUMENTS (HEAD PAGE)

拉合尔±660kV换流站 工程 施工图 阶段
±660kV Lahore Converter Station PROJECT Detail Design DESIGN STAGE

总图 专业 第 01 卷 第 02 册
General layout SPECIALITY VOLUME BOOK

卷册 名称 站区道路图（装备院设计）
Volume name Drawings of road for the station (Design of CET)

批 准 APPROVED BY	田良玉
审 核 REVIEWED BY	杨素娟
设计/勘测 DESIGNED BY/ SURVEYED BY	程建
图纸 2 张 DRAWING NOS.	打印件 / 本 PRINTED COPIES NOS.

序号 No.	图 号 DRAWING NO.	文件名称 DOCUMENT TITLE	版本 EDITION	张 NOS.	本 NOS.	备注 REMARKS
1	49-B60011S-Z0102-001	站内道路平面图（装备院设计） Plan layout of road for the station (Design of CET)	C	1		
2	49-B60011S-Z0102-002	站内道路详图 Detail of road for the station	A	1		

注:

华东院设计 Design of ECEPDI | 装备院设计 Design of CET

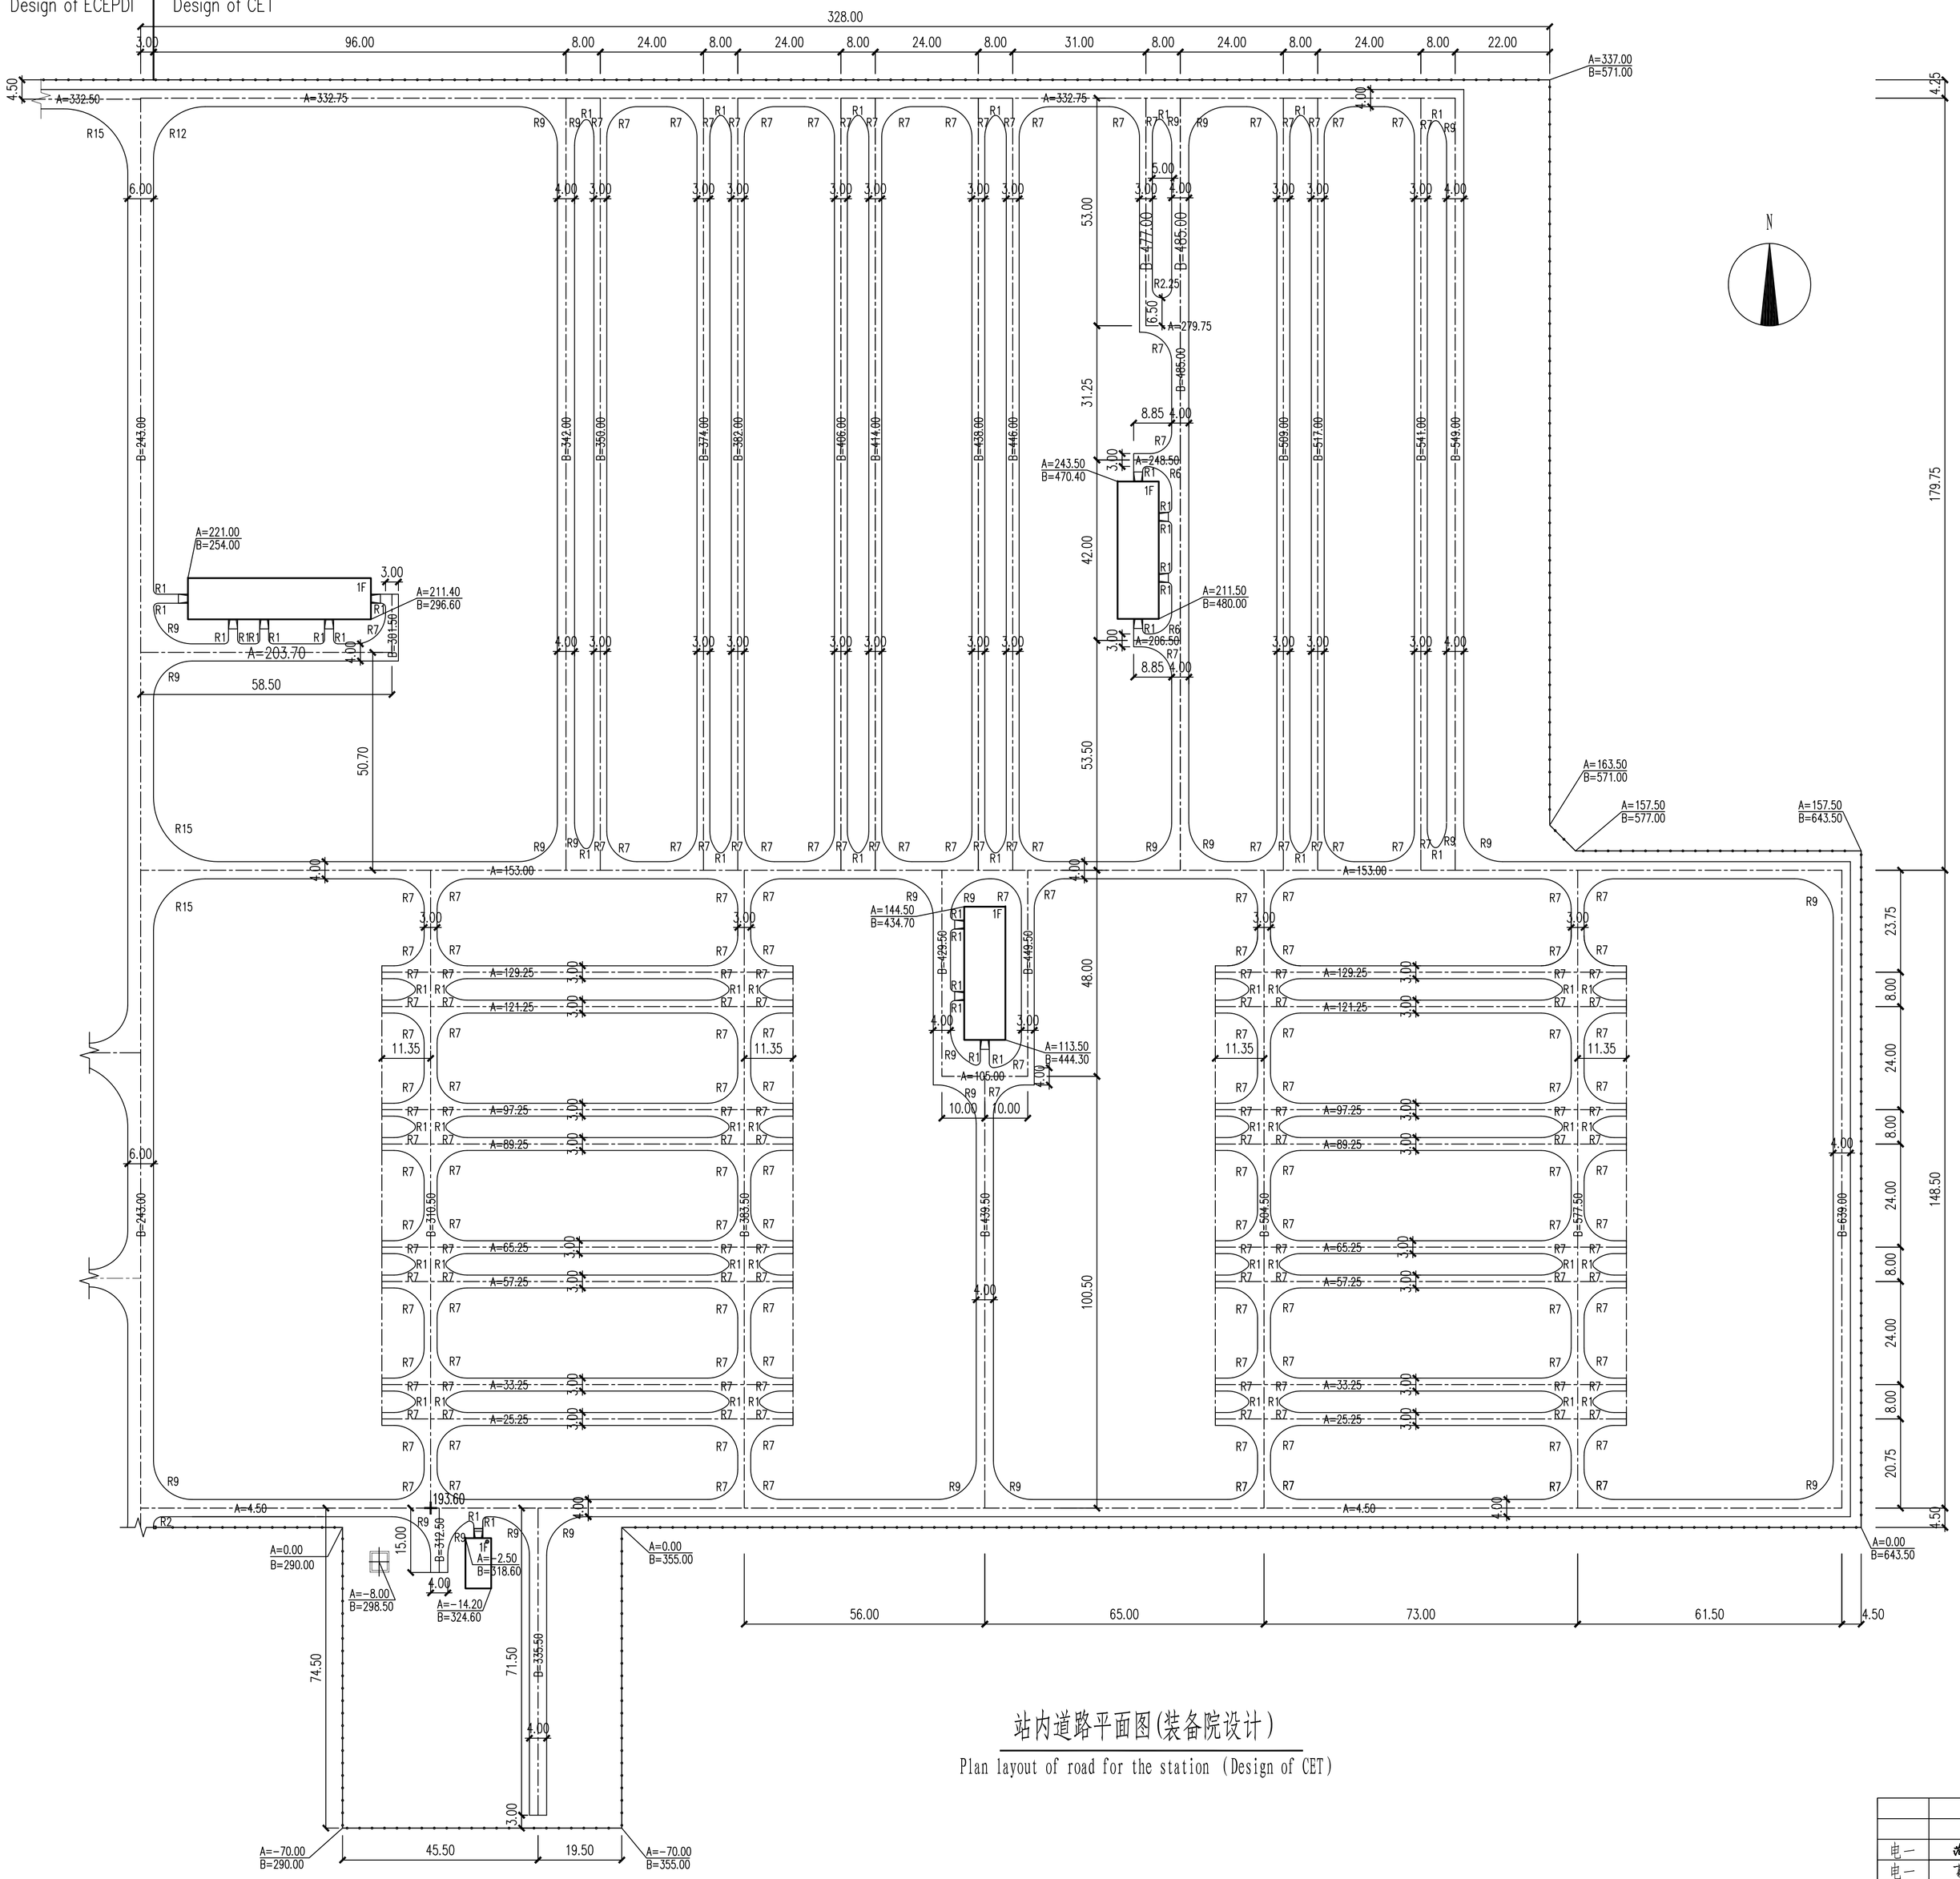

说明:

1.本图采用巴基斯坦UTM-43N平面坐标系，EGM2008高程系统。
2.相对平面坐标以米(m)为单位，尺寸以米(m)为单位。
3.场地平均设计标高为193.40m。
4.站内道路为郊区型道路，道路中心标高193.60m。
5.站内道路设计等级为四级，设计时速15km/h，设计年限10年。
6.未注明道路的转弯半径均为7.0米。
7.过道路电缆沟、房屋坡道及埋管等全部施工完成后，方可浇筑道路面层.

Notes:

1.Coordinate system: Pakistan UTM-43N. Elevation system: EGM2008
2.Relative coordinates system is measured in meter.
Dimensions are measured in meter.
3.Site level is equal to 193.40m.
4.Interior Road is suburban type, the center level of interior road is 193.60m
5.Designed level: Designed speed: 15km/h;Designed period : about 10 years.
6.The radius of interior roads which are not indicated is 7.0m.
7.It is only after the construction of cable trenches crossing the road 、Ramp of rooms and buried pipes that the construction of roads are allowed to start.

LEGEND(图例)

A=157.50 B=643.50	Location coordinate 定位坐标
	Fence 围栏
	Road 道路
R7	Road turning radius 道路转弯半径

本图建筑(A、B)坐标与UTM-43N平面坐标系关系如下所示:

The relationship between relative coordinate system and UTM-43N system is as below:

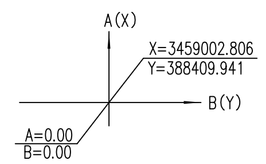

站内道路平面图(装备院设计)

Plan layout of road for the station (Design of CET)

Reference Drawings

Drwg. No.	Title

Revisions

	Name	Date	Notes

巴基斯坦默蒂亚里—拉合尔±660kV直流输电工程

±660kV HVDC Project from Matiari to Lahore in Pakistan

NATIONAL TRANSMISSION & DESPATCH COMPANY (NTDC) LIMITED PAKISTAN

CONTRACTOR 国家电网 STATE GRID 中国电力技术装备有限公司 CHINA ELECTRIC POWER TECHNOLOGY EQUIPMENT CO.,LTD.

拉合尔±660kV换流站

±660kV Lahore Converter Station

设计阶段 PHASE: 施工图 Detail Design

M L H V D C - L C S - C E T - D D - G L - 0 1 0 2 - 0 0 1 C

专业 Speciality	会签 Sign	日期 Date
电一	沈上海	2019.06.03
电一	苏小成	2019.06.03

	姓名 Name	日期 Date
设计 Designed	张佳	2019.06.03
校核 Checked	张新	2019.06.03
审核 Reviewed	杨素涛	2019.06.03
批准 Approved	田汉平	2019.06.03

比例 Scale: 1:800 | 图号 DWG NO.: 49-B60011S-Z0102-001 | 版本 REV.: C

站内道路平面图(装备院设计)

Plan layout of road for the station (Design of CET)

594X841

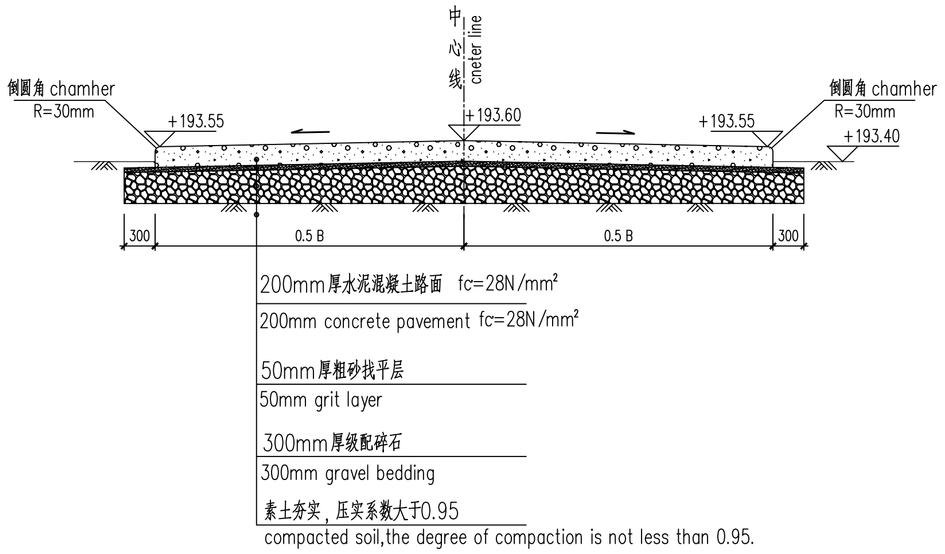

站内道路横断面图

Section of road

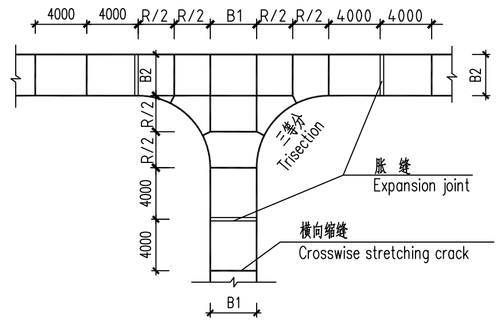

道路接缝布置图

Road Joint

丁字口

T-mouth

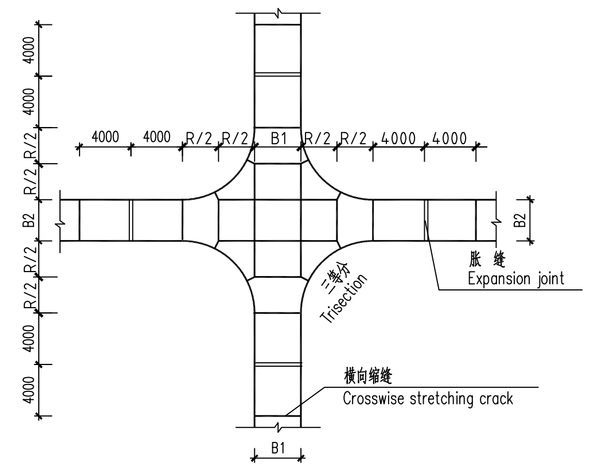

道路接缝布置图

Road Joint

十字口

Cross Mouth

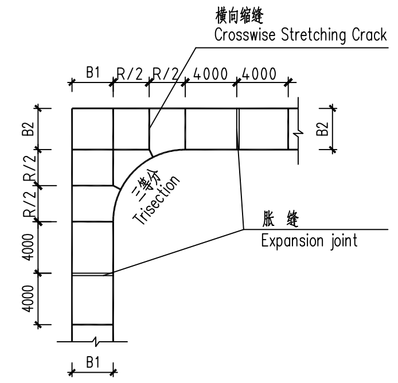

道路接缝布置图

Road Joint

L字口

L Word Port

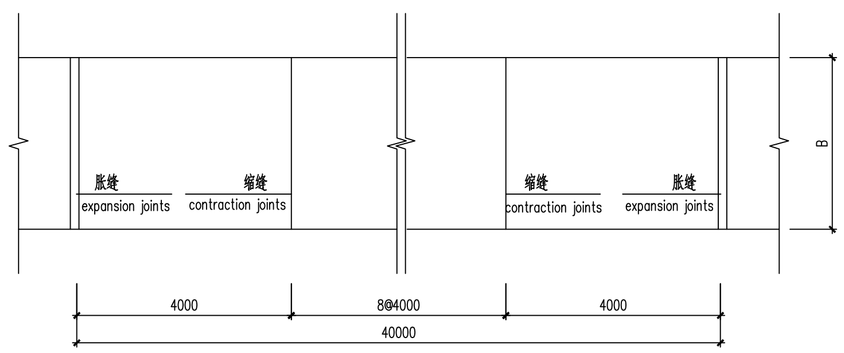

典型伸缩缝布置图

Typical arrangement of expansion joints

说明：

1. 碎石基层：颗粒最大尺寸不宜超过60mm，石料中不得含有有机质。
2. 基层压实要求：应在混合料处于或略大于最佳含水量时进行碾压。路基沉降稳定后，基层检验合格方可进行面层的施工。
3. 站内道路表层耕植土应去除，路基土须用重型压路机分层碾压密实，分层厚度不大于20cm，压实度不小于0.95。
4. 在基层碾压成型后，需检查基层的强度和质量，基层强度以基层顶面的当量回弹模量值为强度检查指标(承载板法)，其当量回弹模量值不得小于80MPa。
5. 缩缝间距一般为3.5~4.5m，在局部衔接部位可为3~5m. 混凝土路面板块不得错缝布置，道路分缝以面板不出现锐角为原则，现场可根据实际情况适当调整。
6. 钢筋：Φ—ASTM A615 Grade 40, fy = 280MPa； ⌀—ASTM A615 Grade 60, fy = 420MPa.
7. 胀缝传力杆有套筒一端应交错布置在相邻板块之中。所有传力杆位置应严格保持水平，并垂直板缝。
8. 尺寸以mm为单位。

Note:

1. Gravel bedding: the maximum size should not exceed 60mm, and does not contain organic material and shall not be greater than 0.8 times the thickness of the layer. No organic matter in gravel.
2. Compaction should be carried out in the best water content of the roller. Subgrade settlement after the stabilization, the construction of the surface layer can be carried out after the inspection.
3. The surface of the road surface should be removed, the subgrade soil must be compacted with heavy roller, the thickness of every layer is not more than 20cm, the degree of compaction is not less than 0.95.
4. After the roller compaction, the strength and quality of the base should be checked, the value of resilient modulus of the base surface should exceed 80MPa.
5. The contraction joint spacing is generally 3.5~4.5m, and it can be adjusted in range of 3~5m at Intersection. Concrete pavement plate shall not be staggered arrangement. The arrangement of deformation joints of concrte slabs shall be based on principle of no acute angle and the joints can be adjusted according to the actual situation.
6. Steel bars: Φ—ASTM A615 Grade 40, fy = 280MPa； ⌀—ASTM A615 Grade 60, fy = 420MPa.
7. The side with the barrel of the Dowel Bar of the Expansion Joint must be phased in adjacent plates. All the dowel steel bars should be placed in horizontal and vertical to the Board.
8. Dimensions are in mm.

图中符号说明

Symbol Description

h	道路面层厚度	Road Pavement Thickness
R	道路转弯半径	Road Turning Radius
B, B1, B2	道路宽度	The Width of Road

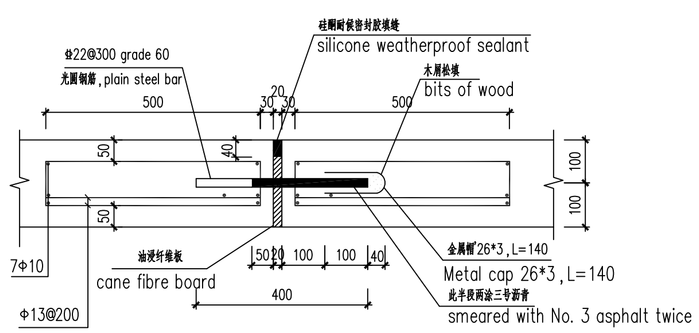

胀缝构造

Expansion Joint

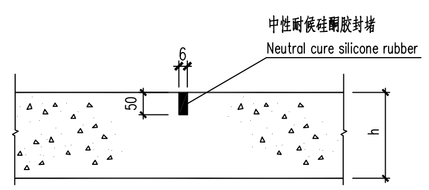

横向缩缝构造

Crosswise Stretching Joint

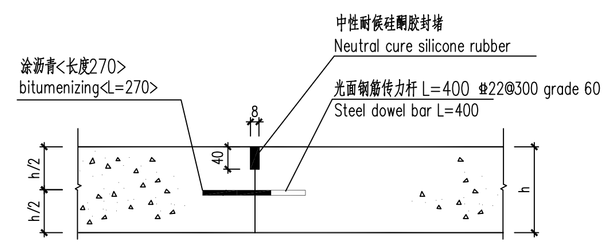

横向施工缝构造

Crosswise Construction Joint

Reference Drawings

Drwg. No.	Title

Revisions

	Name	Date	Notes

巴基斯坦默蒂亚里—拉合尔±660kV直流输电工程

±660kV HVDC Project from Matiari to Lahore in Pakistan

NATIONAL TRANSMISSION & DESPATCH COMPANY (NTDC) LIMITED PAKISTAN

CONTRACTOR 国家电网 STATE GRID 中国电力技术装备有限公司 CHINA ELECTRIC POWER EQUIPMENT AND TECHNOLOGY CO.,LTD.

拉合尔±660kV换流站

±660kV Lahore Converter Station

设计阶段 PHASE: 施工图 Detail Design

M L H V D C - L C S - C E T - D D - G L - 0 1 0 2 - 0 0 2 A

	姓名 Name	日期 Date
设计 Designed	程健	2019.06.03
校核 Checked	张彬彬	2019.06.03
审核 Reviewed	杨素娟	2019.06.03
批准 Approved	田俊琴	2019.06.03

站内道路详图

Detail of road for the station

比例 Scale	图号 DWG NO.	版本 REV.
1:500	49-B60011S-Z0102-002	A

专业 Speciality	会签 Sign	日期 Date
电一	沈三龙	2019.06.03
电一	石*成	2019.06.03

594X841