| 卷册检索号<br>SEARCH NO. OF THE VOLUME |
|---|
| MLHVDC-ENG-ECI-DD-GL-0101<br>30-B003701S-Z0101 |

第 1 页 共 1 页
PAGE OF

# 图纸文件目录（首页）

## CATALOG OF DRAWING DOCUMENTS (HEAD PAGE)

拉合尔±660kV换流站 工程 施工图 阶段
±660kV Lahore Converter Station PROJECT Detail Design DESIGN STAGE

总图 专业 第 01 卷 第 01 册
General Layout SPECIALITY VOLUME BOOK

卷册名称 站址用地图
Volume name Location Planning of Lahore Converter Station

| | |
|---|---|
| 批 准<br>APPROVED BY | |
| 审 核<br>REVIEWED BY | |
| 设计/勘测<br>DESIGNED BY/ SURVEYED BY | |
| 图纸 1 张<br>DRAWING NOS. | 打印件 0 本<br>PRINTED COPIES NOS. |

| 序号<br>No. | 图 号<br>DRAWING NO. | 文件名称<br>DOCUMENT TITLE | 版本<br>EDITION | 张<br>NOS. | 本<br>NOS. | 备注<br>REMARKS |
|---|---|---|---|---|---|---|
| 1 | B003701S-Z0101-001 | 站址用地图<br>Location Planning of Lahore Converter Station | A | 1 | | |

注:

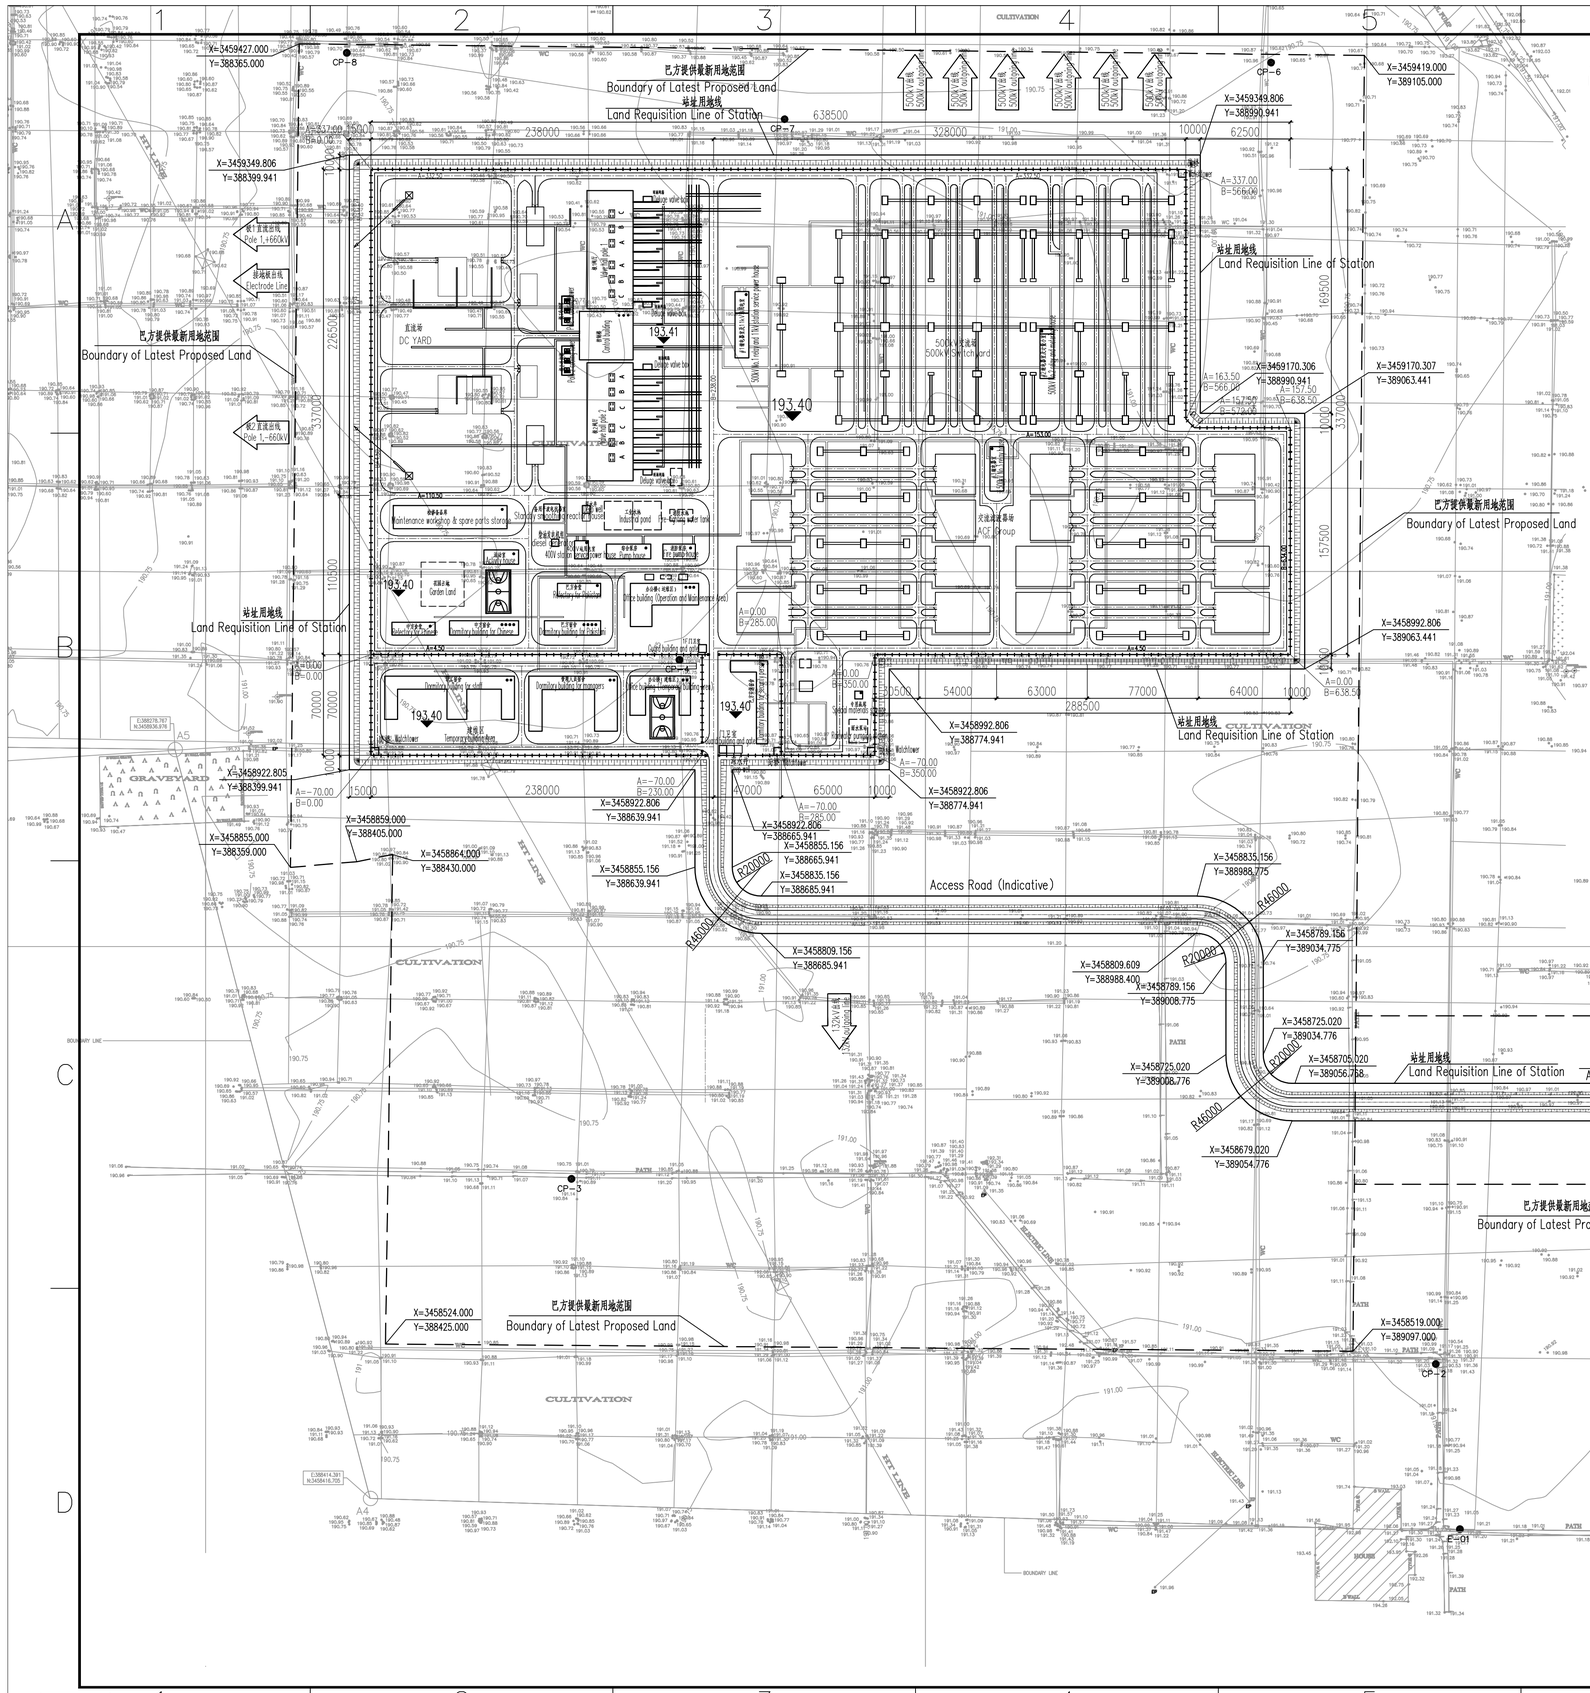


说明:
NOTES:

1. 本图根据设院2015年10月初步设计阶段测量图进行设计绘制。
采用巴基斯坦UTM-43N平面坐标系，EGM2008高程系统。

1. This drawing is designed based on preliminary design stage topographic map provided by ECEPDI in October 2015.
Coordinate system: UTM 43N, Elevation system:EGM2008.

2. 平面坐标以米为单位，尺寸以毫米为单位。

2. The plane coordinates are in meters and the dimensions are in millimeters.

3. 本图以CP-3、CP-10、CP-6、CP-8为定位点.坐标分别为:

3. The drawing uses point CP-3, CP-10, CP-6 and CP-8 as locating points, and the corresponding coordinates are as below:

| | | | | | |
|---|---|---|---|---|---|
| CP-3 | X(m)=3458638.678 | CP-10 | X(m)=3458726.757 |
| 191.166 | Y(m)=388554.185 | 191.521 | Y(m)=389586.869 |
| CP-6 | X(m)=3459413.990 | CP-8 | X(m)=3459420.705 |
| 191.354 | Y(m)=389040.061 | 191.066 | Y(m)=388398.196 |

4. 本图坐标(A、B)坐标与UTM-43N平面坐标系关系如下所示:

4. The relationship between relative coordinate system and UTM-43N system is as below:




5. 换流站场地平均设计标高为193.40m。

5. The average design site level is equal to 193.40m.

7. 进站道路路面宽6.0m，自站区南侧接入Bhai Pheru-Mor Khunda Road公路，长度约1240m。

7. The width of access road is 6.0m. The access road connects to the Bhai Pheru-Mor Khunda Road highway. And the length of it is about 1240m.

8. 用地面积一览表

8. Site area indicator:

| 序号 No. | 项目 Items | 单位 Unit | 数量 Quantity | 备注 Remarks |
|---|---|---|---|---|
| 1 | 站址总用地面积 Total area within Land Requisition Line | | 28.2416 | |

9. 由于站区安保方案暂缺，站址用地面积指标未考虑安保方案所需用地面积。

9. Owing to the temporary shortage of Station Area security scheme, the site area indicator does not consider the land area required for the security scheme.

10. 本工程初设设计尚未审定，未通过NTDC审核，站址位置及站址用地面积均存在修改的可能，施工前请联系业主与设计确认，由此引起的方案变更设计不予负责。

10. As the preliminary design documents are not approved by NTDC, the project solution has possibility to be modified. The design contractor has no responsibility for the project solution changed, if the construction contractor not get authorized by project owner and design contractor before construction started.

Reference Drawings

| Drwg. No. | Title |
|---|---|
| | |

Revisions

| Name | Date | Notes |
|---|---|---|
| | | |

巴基斯坦默蒂亚里—拉合尔±660kV直流输电工程
±660kV HVDC Project from Matiari to Lahore in Pakistan

NATIONAL TRANSMISSION & DESPATCH COMPANY (NTDC) LIMITED PAKISTAN

CONTRACTOR 国家电网 State Grid 中国电力技术装备有限公司 CHINA EQUIPMENT

SUBCONTRACTOR East China Electric Power Design Institute Co.,Ltd.

拉合尔±660kV换流站
±660kV Lahore Converter Station

设计阶段 PHASE: 施工图 Detail Design

M L H Y D C - E N G - E C I - D D - G L - 0 1 0 1 - 0 0 1 A

| | 姓名 Name | 日期 Date |
|---|---|---|
| 设计 Designed | 毛清清 | |
| 校核 Checked | 刘娥 | |
| 审核 Reviewed | 孙志坚 | |
| 批准 Approved | 沙志坚 | |
| 比例 Scale | | |

# 站址用地图

# Location Planning of Lahore Converter Station

图号 DWG NO.: B003701S-Z0101-001

版本 REV.: A

A1(841x594)