| 卷册检索号<br>SEARCH NO. OF THE VOLUME |
|---|
| MLHVDC-ENG-ECI-DD-GL-0106<br>30-B003701S-Z0106 |



# 图纸文件目录（首页）

## CATALOG OF DRAWING DOCUMENTS (HEAD PAGE)

拉合尔±660kV换流站 工程 施工图 阶段
±660kV Lahore Converter Station PROJECT Detail Design DESIGN STAGE

总图 专业 第 01 卷 第 06 册
General Layout SPECIALITY VOLUME BOOK

卷册名称 站内道路--直流场
Volume name Main road of the station -- DC area

| | |
|---|---|
| 批 准<br>APPROVED BY | |
| 审 核<br>REVIEWED BY | |
| 设计/勘测<br>DESIGNED BY/ SURVEYED BY | 杨晨曦 |
| 图 纸 2 张<br>DRAWING 2 NOS. | 打印件 0 本<br>PRINTED COPIES 0 NOS. |

| 序号<br>No. | 图 号<br>DRAWING NO. | 文件名称<br>DOCUMENT TITLE | 版本<br>EDITION | 张<br>NOS. | 本<br>NOS. | 备注<br>REMARKS |
|---|---|---|---|---|---|---|
| 1 | 30-B003701S-Z0106-01 | 站内道路及埋管平面图--直流场<br>layout of road of the station and buried pipe -- DC area | A | 1 | | |
| 2 | 30-B003701S-Z0106-02 | 站内道路详图--直流场<br>detail of road of the station -- DC area | A | 1 | | |

注:

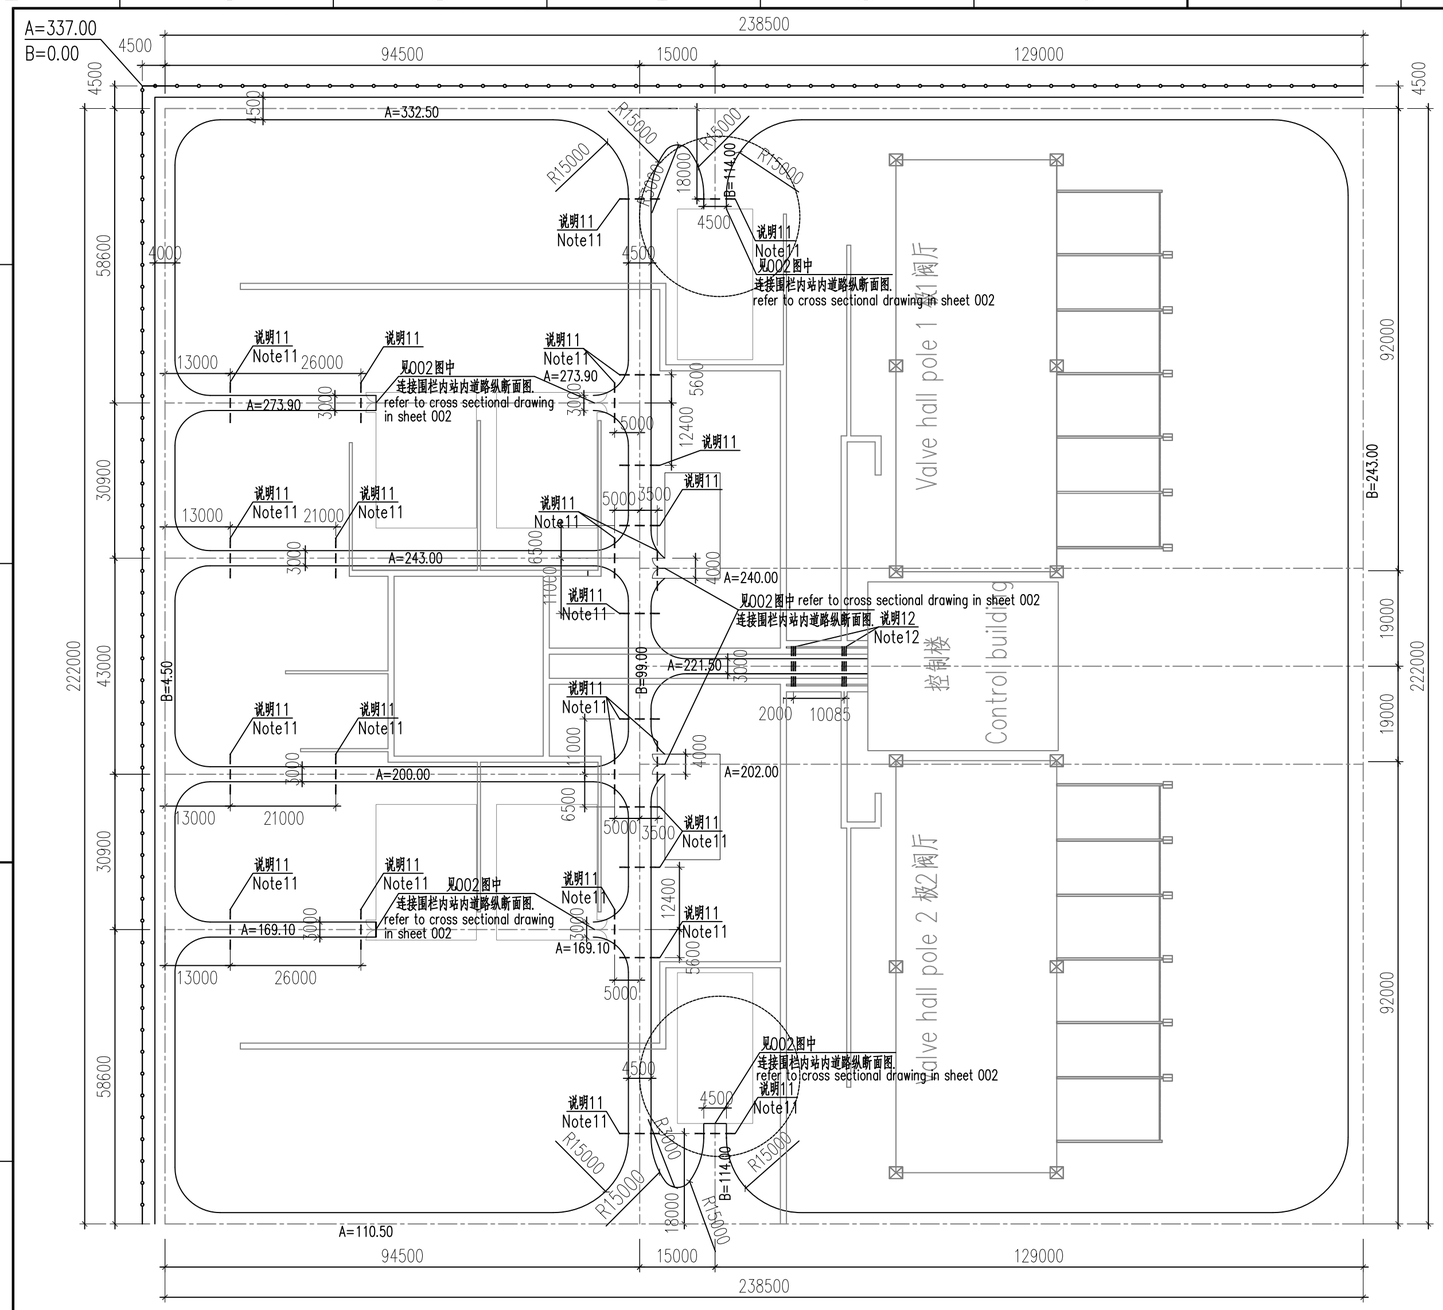


站内道路及埋管平面图--直流场

layout of road of the station and buried pipe -- DC area

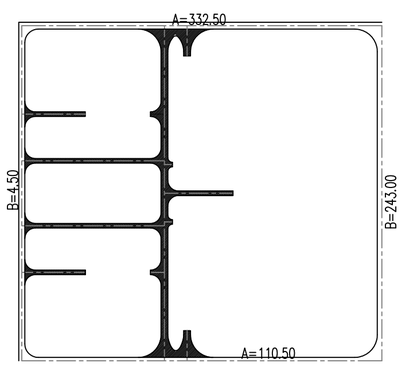


SCOPE（阴影范围为本卷册内容）

| | |
|---|---|
| A=-70.00 | Location coordinate 定位坐标 |
| | Fence 围栏 |
| | road 道路 |
| | Buried pipes 过道路埋管 |
| | Cable trench 电缆沟 |

LEGEND（图例）

说明:

Notes:

1.本图采用巴基斯坦UTM-43N平面坐标系，EGM2008高程系统。

1.Coordinate system: Pakistan UTM-43N. Elevation system: EGM2008

2.相对平面坐标以米（m）为单位，尺寸以毫米（mm）为单位。

2.Relative coordinates system is measured in meter.Dimensions are measured in millimeters.

3.场地平均设计标高为193.40m。

3.Site level is equal to 193.40m.

4.本图建筑（A、B）坐标与UTM-43N平面坐标系关系如右图所示:

4.The relationship between relative coordinate system and UTM-43N system is as right:

5.站内道路为郊区型道路，道路中心标高193.60m。局部连接围栏内区域，道路中心标高193.55。

5.Interior Road is suburban type, the center level of interior road is 193.60m, and for areas linking the fence the level is 193.55.

6.站内道路设计等级为四级，设计时速15km/h,设计荷载以单轴100kN为设计荷载，设计年限10年。

6.Designed level: 4 Designed speed:15km/h;Designed single axle load: 100kN;Designed period : about 10 years.

7.未注明道路的转弯半径均为7.0米。

7.The radius of interior roads which are not indicated is 7.0m.

8.本工程初设设计尚未最终审定，最终方案有存在调整可能，是否按图施工由总包CET决定，由此造成的变更设计不予负责。

8.As the preliminary design documents have not yet been approved finally, the project solution has probability to be modified. The design contractor has no responsibility for the project solution changed, if the construction contractor does not get authorized by CET before construction..

9.电缆沟过道路做法见相关卷册。

9.For the details of cable trench crossing the road, refer to related drawings .

10.过道路电缆沟及埋管等全部施工完成后，方可浇筑道路面层。

10.It is only after the construction of cable trenches crossing the road and buried pipes that the construction of roads are allowed to start.

11.标注处预埋1x1xø150镀锌钢管，顶标高+192.90米，埋管两端伸出道路基础500mm,共计26处。

11.As the place be notified buried 1x1xø150 galvanized steel pipes, with the elevation of +192.4m, and for each side the pipes shall stretch out of the road for 500mm. There is 26 in total.

12.标注处预埋3x4xø150镀锌钢管，连通两侧电缆沟，做法及定位参见电缆沟卷册，共计2处。

12.As the place be notified buried 3x4xø150 galvanized steel pipes linking cable trench on both sides. For the details refer to sheets of cable trenches. There is 2 in total.

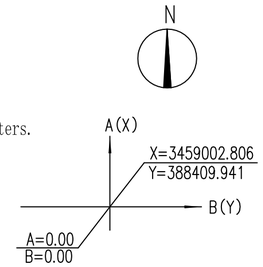


Reference Drawings

| Drwg. No. | Title |
|---|---|
| | |

Revisions

| | Name | Date | Notes |
|---|---|---|---|
| | | | |

巴基斯坦默蒂亚里—拉合尔±660kV直流输电工程

±660kV HVDC Project from Matiari to Lahore in Pakistan

NATIONAL TRANSMISSION & DESPATCH COMPANY (NTDC) LIMITED PAKISTAN

CONTRACTOR 国家电网 STATE GRID 中国电力技术装备有限公司 CHINA ELECTRIC POWER EQUIPMENT AND TECHNOLOGY CO.,LTD.

SUBCONTRACTOR East China Electric Power Design Institute Co.,Ltd.

拉合尔±660kV换流站

±660kV Lahore Converter Station

设计阶段 PHASE: 施工图 Detail Design

M L H V D C - E N G - E C I - D D - G L - 0 1 0 6 - 0 0 1 A

| | 姓名 Name | 日期 Date |
|---|---|---|
| 设计 Designed | 杨晨曦 | 2018.11.28 |
| 校核 Checked | | |
| 审核 Reviewed | | |
| 批准 Approved | | |
| 比例 Scale | 1:1000 | 图号 DWG NO. |

| 电气 | 郑煜 | 2018.11.28 |
|---|---|---|
| 专业 Speciality | 会签 Sign | 日期 Date |

# 站内道路及埋管平面图--直流场

layout of road of the station and buried pipe -- DC area

30-B003701S-Z0106-001

版本 REV. A

420X594

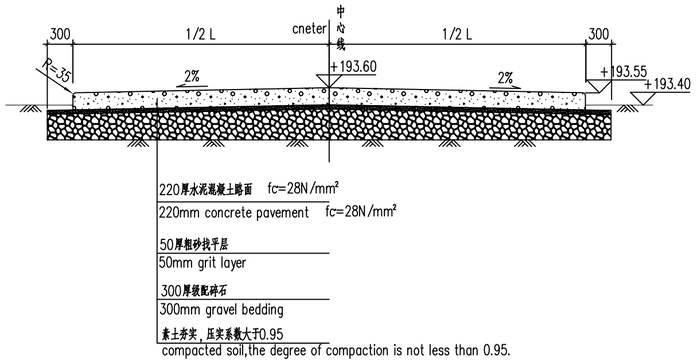


站内道路横断面图

section of road

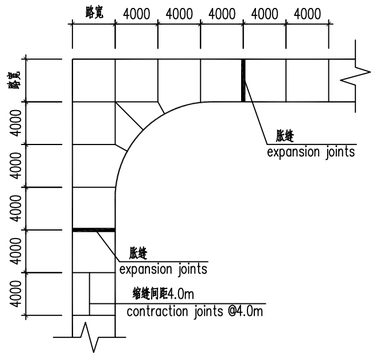


"L"型路口分缝图

"L" style cross road joint detail

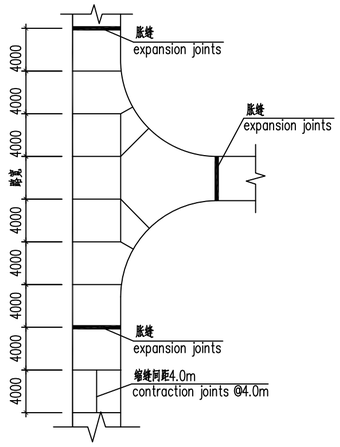


"T"型路口分缝图

"T" style cross road joint detail

说明：

Note：

1.碎石基层：颗粒最大尺寸不宜超过60mm，石料中不得含有有机质。

1.Gravel bedding: the maximum size should not exceed 60mm, and does not contain organic material and shall not be greater than 0.8 times the thickness of the layer.No organic matter in gravel.

2.基层压实要求：应在混合料处于或略大于最佳含水量时进行碾压。基层检验合格后方可进行面层的施工。

2.Compaction should be carried out in the best water content of the roller. The construction of the surface layer can be carried out after the inspection.

3.站内道路表层耕植土应去除，路基土须用重型压路机分层碾压密实，分层厚度不大于30cm，压实度不小于0.95。

3.The surface of the road surface should be removed, the subgrade soil must be compacted with heavy roller, the thickness of every layer is not more than 30cm, the degree of compaction is not less than 0.95.

4.在基层碾压成型后,需检查基层的强度和质量,基层强度以基层顶面的当量回弹模量值为强度检查指标(承载板法),其当量回弹模量值不得小于80MPa.

4.After the roller compaction, the strength and quality of the base should be checked, the value of resilient modulus of the base surface should exceed 80MPa.

5.道路分缝以面板不出现锐角为原则，现场可根据实际情况适当调整

5.The arrangement of deformation joints of concrte slabs shall be based on principle of no acute angle and the joints can be adjusted according to the actual situation.

6.埋管为镀锌钢质，标注含义如下,规格为159x4.5

3x4xø150
- 埋管内径(mm)
- 每层的埋管根数
- 埋管层数

6.The material of buried pipes are galvanized steel and the symbol indicates as follows, the size is 159x4.5

3x4xø150
- inner diameter(mm)
- number of pipes for every layer
- number of layers

7.道路分缝施工时应结合站内主道路相关图纸。

7.When joints are under construction please also refer to related sheets such as the sheet of main roads.

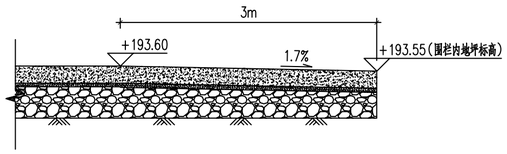


连接围栏内站内道路纵断面图

section of road linking fences

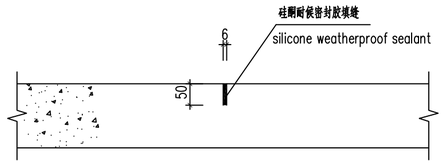


缩缝详图

section of contraction joints

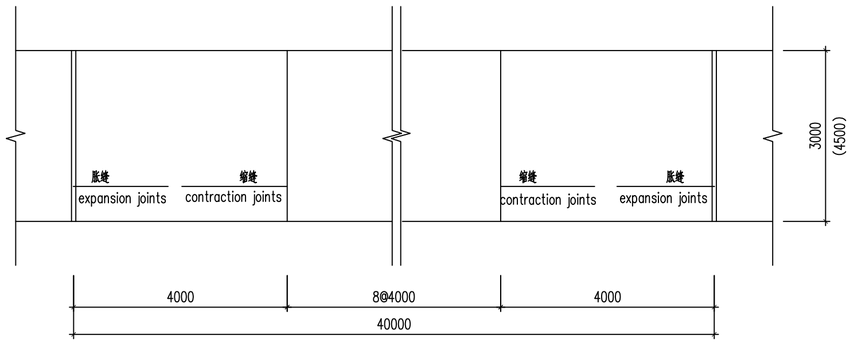


典型伸缩缝布置图

typical arrangement of expansion joints

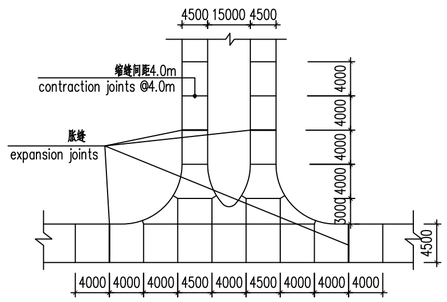


"π"型路口分缝图

"π" style cross road joint detail

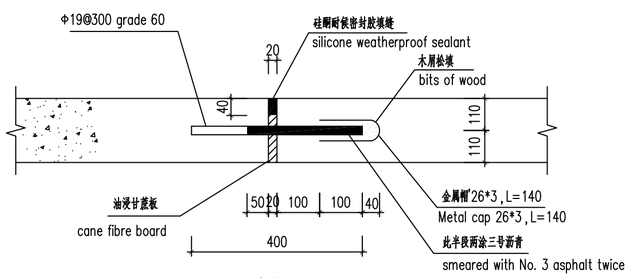


胀缝详图

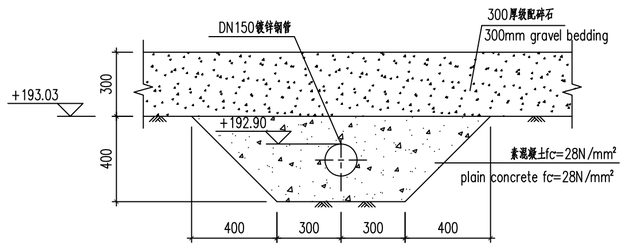


1x1xø150过道路埋管

1x1xø150 buried pipe

Reference Drawings

| Drwg. No. | Title |
|---|---|
| | |

Revisions

| | Name | Date | Notes |
|---|---|---|---|
| | | | |

巴基斯坦默蒂亚里—拉合尔±660kV直流输电工程

±660kV HVDC Project from Matiari to Lahore in Pakistan

NATIONAL TRANSMISSION & DESPATCH COMPANY (NTDC) LIMITED PAKISTAN

CONTRACTOR 国家电网 STATE GRID 中国电力技术装备有限公司 CHINA ELECTRIC POWER EQUIPMENT AND TECHNOLOGY CO.,LTD.

SUBCONTRACTOR East China Electric Power Design Institute Co.,Ltd.

拉合尔±660kV换流站

±660kV Lahore Converter Station

设计阶段 PHASE: 施工图 Detail Design

M L H V D C - E N G - E C I - D D - G L - 0 1 0 6 - 0 0 2 A

| | 姓名 Name | 日期 Date |
|---|---|---|
| 设计 Designed | 杨晨曦 | 2018.11.28 |
| 校核 Checked | 刘俊 | |
| 审核 Reviewed | 邹晓清 | |
| 批准 Approved | 韩加宁 | |
| 比例 Scale | | 图号 DWG NO. |

# 站内道路详图--直流场

# detail of road of the station -- DC area

30-B003701S-Z0106-002

版本 REV. A

| 电气 | 郑煜 | 2018.11.28 |
|---|---|---|
| 专业 Speciality | 会签 Sign | 日期 Date |

420X594