卷册检索号 SEARCH NO. OF THE VOLUME
MLHVDC-LCS-ECI-DD-HA-0213 30-B003701S-N0213

第 1 页 PAGE　共 1 页 OF

图纸文件目录（首页）

CATALOG OF DRAWING DOCUMENTS (HEAD PAGE)

拉合尔±660kV换流站 ±660kV Lahore Converter Station 工程 PROJECT　施工图 Detail Design 阶段 DESIGN STAGE

暖通 HVAC 专业 SPECIALITY　第 02 卷 VOLUME　第 13 册 BOOK

卷册名称 Volume name　站前区办公楼通风及空调 Office building (The first Building Area) HVAC Drawing

批　准 APPROVED BY	和[illegible]
审　核 REVIEWED BY	和[illegible]
设计/勘测 DESIGNED BY/ SURVEYED BY	吕笑宇
图纸 DRAWING 4 张 NOS.	打印件 PRINTED COPIES 0 本 NOS.

序号 No.	图　号 DRAWING NO.	文件名称 DOCUMENT TITLE	版本 EDITION	张 NOS.	本 NOS.	备注 REMARKS
1	30-B003701S-N0213-001	站前区办公楼通风和空调工程设计及施工说明 Ventilation and Air-Conditioning Project Design & Construction Specifications	A	1		
2	30-B003701S-N0213-002	站前区办公楼一层通风空调平面图 Office building Ventilation and Air-Conditioning plan on the First floor	A	1		
3	30-B003701S-N0213-003	站前区办公楼二层通风空调平面图 Office building Ventilation and Air-Conditioning plan on the Second floor	A	1		
4	30-B003701S-N0213-004	站前区办公楼三层通风空调平面图 Office building Ventilation and Air-Conditioning plan on the Third floor	A	1		

注:

通风和空调工程设计说明

Ventilation and Air-Conditioning Project Design Specifications

一、 工程概况

Ⅰ. Project Overview

1. 项目名称：巴基斯坦默蒂亚里—拉合尔±660kV直流输电工程/拉合尔±660kV换流站

Project name：±660kV HVDC Project from Matiari to Lahore in Pakistan

2. 建设单位：国家电网/中国电力技术装备有限公司

Development organization：State Grid / China Electric Power Equipment And Technology CO.,TD

3. 设计范围：站前区1栋单体

Design scope: The first Building Area / about 1 building

4. 单体概况：

单体名称	建筑层数	建筑高度 m	建筑面积 m^2	室内外高差 m	建筑分类	耐火等级
站前区办公楼	3	12.40	1972	0.45	多层民用建筑	二级

结构形式：砖混　　结构使用年限：50年

抗震设防烈度：7度半　　防水层使用年限：15年

Building Overview:

Name	Building Storey	Height m	Area m^2	Altitude intercept m	Building classification	fire resistance rating
Office Building (The first Building Area)	3	12.40	1972	0.45	multistory civil building	second level

Structural style: masonry structure　　Service life of structure: 50 years

Earthquake fortification intensity: 7degree and a half　　Life of waterproof layer: 15years

二、 室内外设计参数

Ⅱ. Indoor and outdoor design parameters

1. 室外气象参数

Outdoor meteorological parameter

夏季室外计算干球温度：	43.2℃
Summer outside dry-bulb temperature:	
夏季室外计算湿球温度：	23.2℃
Summer outside wet-bulb temperature:	
供暖室外计算温度：	3.9℃
Heating outdoor temperature:	
极端最高气温：	48.0℃（2007.6.10）
Extreme maximum temperature:	
极端最低气温：	−2.2℃（2008.1.22）
Extremely minimum temperature:	
年平均气压：	983.1hPa
Annual mean atmospheric pressure:	
年平均相对湿度：	57%
Annual mean relative humidity:	
年平均风速：	1.6m/s
Annual mean air speed:	
主导风向：	NW
Prevailing wind direction:	

2. 室内参数

Indoor parameters

参数 Parameter / 房间名称 Room name	夏季 Summer ℃	夏季 Summer %	冬季 Winter ℃	冬季 Winter %
办公室 Office	26～28	≤70%	16～18	——
会议室 Meeting room	26～28	≤70%	16～18	——
实验室 Lab	26～28	≤70%	16～18	——
配电间 Distribution room	≤40	≤70%	——	——

3. 通风标准

Ventilation standard

参数 Parameter / 房间名称 Room name	换气次数 Air change rate 次/时 Times/Hour
卫生间 Toilet	＞ 10
茶水间 Tea room	＞ 10
实验室 Lab	＞ 10

4. 灭后通风标准

After the fire ventilation standard

参数 Parameter / 房间名称 Room name	换气次数 Air change rate 次/时 Times/Hour
配电间 Distribution room	＞ 6

三、冷热源配备与设备

Ⅲ. Cold and heat source outfit and equipment

本工程的空调系统采用空气源热泵型分体式空调器的形式，空调室外机统一设置在设备平台或地面上，空调冷凝水排至就近地漏或散水。

The air conditioning system of this project is the form of air-source heat pump air conditioner, which is set on the equipment platform or ground, and the air-conditioner condenses water to the nearest floor drain or aproll.

四、通风系统

Ⅳ. Ventilation system

1. 茶水间设有机械通风系统，以排除设备放出的余热，并保证机房内的卫生要求。

Mechanical ventilation systems are set up in tea room，to eliminate the waste heat given off by equipment and meet the sanitary requirements for machine rooms.

2. 卫生间、实验室设置机械通风系统，以去除室内异味。

Mechanical ventilation systems are set up in toilet and lab to remove indoor odors.

五、灭火后通风系统

Ⅴ. After the fire ventilation system

配电间设置机械通风系统，以去除灭火后室内的废气。

Mechanical ventilation systems are set up in distribution room to remove exhaust gases indoors after the fire.

六、消防系统

Ⅵ. Fire-fighting system

1. 防烟设施

Smoke control facilities

本工程的所有楼梯间均采用自然通风的防烟方式，楼梯间设置不小于2.0平方米的可开启外窗，且须层设有不小于1.0平方米的自然通风面积。

For all staircases in this project，it is considered to use the natural smoke control method. It is necessary to set up the openable external windows which are not smaller than 2.0 m^2；moreover，it is necessary to have the natural ventilation area of no less than 1.0 m^2 in the top layer.

2. 排烟设施

Smoke exhaust facilities

本工程所有地上面积大于100平方米的房间和长度大于20米的内走道均采用自然排烟的方式。排烟窗面积按不小于建筑面积的2%进行计算。

For all the rooms whose aboveground area is more than 100 m^2 and the internal aisles whose length is more than 20 m in this project，it is considered to use the natural smoke exhaust method. The calculated area of smoke exhaust windows is not less than 2% of the region area.

3. 其他

Others

采用挡烟垂壁（隔墙、从顶棚下突出不小于0.5米的梁）划分防烟分区。

Vertical smoke screens（partition walls, and the beams which extend out from ceiling by no less than 0.5m）are used for the zoning of smoke compartments.

通风和空调工程施工说明（一）

Ventilation and Air-Conditioning Project Construction Specifications (1)

一、 一般规定

Ⅰ. General regulations

1. 空调通风工程的施工验收应本说明进行，说明中未详之处均应遵照国家标准执行，执行规范如下：

The construction acceptance of air-conditioning and ventilation project shall be performed in accordance with the Specifications. Any detail not described in the Specifications shall adhere to national standards. The codes to be applied are shown as follow:

A.《通风和空调工程施工质量验收规范》　GB 50243-2016

Code for Acceptance of Construction Quality of Ventilation and Air Conditioning Works

B.《通风与空调工程施工规范》　GB 50738-2011

Code for Construction of Ventilation and Air Conditioning Works

C.《机械设备安装工程施工及验收通用规范》　GB 50231-2009

General Code for Construction and Acceptance of Mechanical Equipment Installation Engineering

D.《家用和类似用途空调器安装规范》　GB 17790-2008

Installation specifications for household and similar air-conditioning

E.《通风管道技术规程》　JGJ 141-2004

Technical Procedure of Air Duct

2. 图中的尺寸单位：

Unit of dimensions in drawings

标高以米计；其余尺寸以毫米计。

Elevation is indicated in meter; the rest dimensions are indicated in millimeter.

二、风道：

Ⅱ. Ducts

1. 管材、制作、安装：

Piping，fabrication and installation

排风管采用镀锌钢板制作，风管配件、厚度和允许漏风量等均应符合规范A低压系统风管的规定，同时应符合规范 A/B 风管的规定。

Exhaust ducts are made of galvanized steel plates, and the fittings, thickness and allowable air leakage of ducts shall conform to the regulations on low-pressure system ducts in the code A; at the same time, the regulations on ducts in the codes A/B shall be conformed to.

2. 风管上的部件（防火阀、消声器等）安装时，气流方向应正确、设有单独的支吊架，保证阀板转动灵活，连接风管不变形，阀柄操作方便，保温层应不影响阀杆和阀柄的运动。

When components（such as fire-resistant valves, silencers and etc.）on ducts are mounted, the air flow direction shall be correct, separate supports and hangers shall be set up, free rotation of valve plates shall be ensured, connecting air ducts shall not be deformed, valve handles shall be easy to operate and thermal insulating layers shall have no effect on the movement of valve levers and valve handles.

3. 一般风管的法兰之间可采用厚3～5mm的闭孔海绵橡胶板作密封垫圈；防火阀、排烟风管的法兰垫圈采用防火膨胀圈。

Between the flanges of general air ducts, 3-5mm thick closed-cell foam rubber plates can be used as sealing gaskets; fire-proof expansion rings are used as the flange gaskets of fire-resistant valves and smoke exhaust ducts.

4. 风管止回阀安装时，必须保证其叶片吹起时有足够的直管段长度，确保叶片不受挡、不卡住，平衡杆活动不应受阻挡。

For the installation of check valves in ducts, it is essential to ensure that a sufficient length of straight duct section is present when their vanes are blown up and make sure that vanes are not blocked and seized. The movement of balance bars shall not be hindered.

5. 保温风管穿过墙体、楼板时，应用厚度不小于0.75mm的镀锌钢板做保护壳；保护壳与风管间的间隙尺寸方保温材料的厚度；保护壳墙面应与墙面或楼板底面平齐或略高，但应比楼板面高30mm。

When thermally-insulated air ducts pass through walls and floor slabs, the galvanized steel plates whose thickness is not less than 0.75mm shall be used as their protective shell; the dimension of clearance between the shell and air ducts is equal to the thickness of thermal insulating materials; the end surface of protective shell shall be flush with or slightly higher than the surface of walls or the bottom surface of floor slabs, but it shall be higher than the surface of floor slabs by 30mm.

6. 与防火阀连接的过墙（楼板）风管，应采用厚度不小于 2.0mm 的钢板制作。风管（保温风管的保护壳）与墙或楼板处的空隙应采用不燃材料进行密封处理。

The through-wall (floor slab) air ducts connected to fire-resistant valves shall be made of the steel plates whose thickness is not less than 2.0mm. Sealing treatment shall be performed on the gaps between air ducts (the protective shell of thermally-insulated air ducts) and walls or floor slabs by using incombustible materials.

7. 各楼层的防火阀、风管穿头耐火极限不小于1小时。

The fire endurance of fire-resisting valves and air ducts at individual floors shall not be less than 1 hour.

三、水管管道

Ⅲ. Water pipes

1. 管材及连接要求见下表：

See the below table for the piping and connection requirements:

表一　管材及连接方式　Table 1: Piping and connection method

管道种类 Type of pipe	管径（mm） Pipe diameter	材料及连接方式 Material and connection method		备注 Remarks
空调冷凝水管 Air-conditioning condensate pipes		UPVC管粘接	UPVC pipe adhesion	

2. 空调冷凝水管应顺排水方向设置坡度安装，其坡度不得小于0.008，严禁倒坡；空调器的空气冷凝水管应设存水弯（有效水封高度不小于80mm）或其他隔气措施。

Air-conditioning condensate pipes shall be mounted at a preset gradient along the water drainage direction and their gradient shall not be less than 0.008; a backward slope is forbidden; water traps (The effective water seal height is not less than 80mm.) or other vapor barrier measures shall be taken for the air condensate pipes of air conditioners.

3. 管道穿墙或楼板处必须设置套管，其内径应比管道或保温层外径大20～30mm。

Sleeves must be set up in the places where pipes pass through walls or floor slabs and their inner diameter shall be larger than that of pipes or thermal insulating layer by 20-30mm.

安装在墙体内的套管，其两端应 与墙饰面相平；穿楼板的套管应比建筑面层高30mm。

The both ends of the sleeves mounted inside walls shall be flush with wall finishing; the sleeves passing through floor slabs shall be higher than the surface layer of building by 30mm.

管道的接头焊缝不得设在套管内。在保温工程竣工后，套管与保温层外径之间的空隙用不燃保温材料塞紧。

No joint welding seams of pipes shall be located inside the sleeves. After the completion of thermal insulation work, the gaps between the sleeves and the outer diameter of thermal insulating layers are tightly filled up with inflammable thermal insulating materials.

4. 管道的支、吊架详见国标图集 05R417-1。

See the drawing atlas 05R417-1 of national standard for the details of pipe supports and hangers.

5. 空调冷凝水管必须作充水试验，无渗漏为合格。

Air-conditioning condensate pipes must undergo a water filling test. They are acceptable if no leakage occurs.

6. 管道安装前必须必须将管内浮物及锈蚀清除干净，安装时应保持管道的清洁，严禁施工杂物等落入管内。

Before the installation of pipes, dirt and rust inside the pipes must be cleaned off. During the installation, the cleanliness of pipes shall be kept. It is prohibited to allow any foreign materials from construction to fall into the pipes.

管道压力试验合格后应进行系统清洗，直至系统排出水色和透明度与入口水目测一致为合格，清洗后过滤器应及时拆洗干净。

After the pressure test of pipes is passed, system cleaning shall be carried out. It is not accepted, until the color and transparency of the water discharged from the system become consistent with those of inlet water with visual inspection. After cleaning, filters shall be removed and cleaned up in time.

四、油漆、保温：

Ⅳ. Painting and thermal insulation:

（一）油漆：

(Ⅰ) Painting:

1. 管道在试压、清洗合格后方能进行除锈和油漆工作。

Only after pipes are accepted in their pressure test and cleaning, rust removal and painting work can be performed.

2. 所有非镀锌铁件均须除锈后刷防锈漆两度；非保温者再刷面漆两度。

All non-galvanized iron pieces must be painted in two passes with anti-rust paint after rust removal; the pieces which are not thermally insulated shall be additionally painted in two passes with finishing paint.

通风和空调工程施工说明（二）

Ventilation and Air-Conditioning Project Construction Specifications (2)

3. 非镀锌支、吊架、法兰应在安装前完成除锈、刷漆工作。

Before installation, rust removal and painting work for non-galvanized supports, hangers and flanges shall be completed.

4. 风管角钢法兰先进行两度防锈底漆处理后方可铆接到风管上。

Angle iron flanges of ducts can be riveted onto ducts only after anti-rust primer treatment is performed on them in two passes.

5. 管道最外层显眼处应涂识别色或识别环，识别环宽度应不小于50mm，最大间隔为6m。

An obvious position in the outermost layer of pipes shall be painted in identification color or identification rings. The width of identification rings shall not be less than 50mm and the maximum spacing between them shall be 6m.

（二）保温：

(Ⅱ) Thermal insulation:

1. 所有保温及其辅助材料必须采用不燃或难燃型产品；穿越防火墙的保温风管，在防火墙两侧 2m 范围内须采用不燃材料保温。

All thermal insulating materials and their auxiliary materials to be used must be incombustible or nonflammable products; the thermally-insulated air ducts passing through fire walls must be thermally insulated with incombustible materials within the range of 2 m in both sides of fire walls.

2. 空调冷凝水管采用难燃型发泡橡塑保温，20℃时，λ≤0.037W/(m.k)，厚度均为15mm。

Air-conditioning cold and hot water pipes and air-conditioning condensate pipes need to be thermally insulated. The thermal insulation requirements are shown as follow: Air-conditioning condensate pipes are thermally insulated with the following non-flammable type foaming rubber and plastics: λ≤0.037W/(m.k) at 20℃ and thickness = 15mm.

五、安装参考图集

Ⅴ. References for installation

1. 风机安装参见国标 K101-1～3（通风机安装）。

Fan installation see gb K101-1 ~ 3 (fan installation).

2. 风管制作安装参见国标 07K133，支吊架制作安装参见国家标准 08K132。

For the installation of air duct, see the national standard 07K133, and the installation of a hanger is in the national standard 08K132.

六、热泵型分体式空调器安装

Ⅵ. Installation of heat pump type air conditioner

（一）室内机安装

(Ⅰ) Installation of indoor units

1. 将室内机安装到悬吊螺栓上，上下用螺母垫圈固定，螺栓规格视室内机重量而定。

Indoor units are mounted onto suspension bolts and their upper and lower ends are fixed with nuts and washers. The specifications of bolts depend on the weight of indoor units.

一般室内机在 2匹以下，采用螺栓 M8；大于3匹的采用柜机。

Generally, if the power of indoor units is below 2 horsepower, M8 bolts shall be used; if it is above 3 horsepower, cabinet type indoor unit shall be used.

2. 用水平仪校对机体水平度，水平度应保证在 ±1mm/m之内，严禁向排水口倾斜。

Calibrate the levelness of units with a leveling instrument. It shall be ensured that the degree of levelness is within ±1mm/m. Their inclination to drainage outlets is prohibited.

（二）室外机安装

(Ⅱ) Installation of outdoor units

1. 室外机安装在室外地面上时，应设置在散水范围内，机组下可垫设槽钢支架。

When outdoor units are mounted on the outdoor ground surface, they should be in the range of aproll, cushion steel brackets under the units.

（三）制冷剂管道安装

(Ⅲ) Installation of refrigerant pipes

1. 制冷剂管的配管和保温应由经销商供应，并按国家有关规定设置和安装。

The piping and thermal insulation of refrigerant pipes shall be supplied by the dealer and they shall be set up and installed in accordance with relevant national regulations.

2. 制冷剂配管连接允许长度及配管连接允许的高度差查厂家室外机安装说明。

Refer to the outdoor unit installation instructions of manufacturer for the allowable length for refrigerant piping connections and the allowable height difference for piping connections.

3. 制冷剂管道弯管的弯曲半径应大于5D（管道直径），配管弯曲后的短径与原直径之比应大于2/3。

The bending radius of elbows in refrigerant pipes shall be more than 5D (D = Diameter of pipes). The ratio of the short diameter of bent piping to the original diameter shall be more than 2/3.

4. 管道穿越墙体或楼板处应设钢制保护套管，保护套管应与墙面或楼板底平齐，高出地面30mm。

Steel protection sleeves shall be set up in the places where pipes pass through walls or floor slabs. The protection sleeves shall be flush with the surface of walls or the bottom of floor slabs. They shall be higher than the ground surface by 30mm.

5. 套管与管道四周间隙均匀，应用膨热不燃材料严密封堵。

The clearance between the sleeves and the surrounding of pipes shall be uniform and it shall be tightly sealed up with heat insulating incombustible materials.

（四）制冷剂管道吊架支撑

(Ⅳ) Hanger supporting for refrigerant

水平管道应用吊架或托架支撑，支撑间距考虑铜管的热胀冷缩，不允许将保温厚的制冷剂管道夹紧，支撑间距见下表：

Horizontal pipes shall be supported with hangers or brackets. For the supporting spacing, the thermal expansion and contraction of copper pipes shall be taken into account. It is not allowed to clamp the refrigerant pipes with thick thermal insulation. See the below table for the supporting spacing:

公称直径 Nominal diameter（mm）	≤20	25~40	50
最大间距 Maximum spacing（m）	1.0	1.5	2.0

（五）制冷剂管道清洗与试压

(Ⅴ) Cleaning and pressure test of refrigerant pipes

1. 铜管安装前必须进行脱脂，并用清洁布擦干净。

Before the installation of copper pipes, degreasing must be performed and they must be cleaned up with clean cloth.

施工结束后必须对制冷剂配管进行吹扫，清除管内可能存在的水汽、灰尘和丝状导脏物，吹扫只能采用氮气，冲洗压力为0.6MPa，经反复冲洗至管内无污物方合格。

After the completion of construction, refrigerant piping must be purged to clean off the dirt possibly existing in the pipes, such as moisture, dust, rubbish and etc. Only nitrogen can be used for purging. The flushing pressure is 0.6MPa. When no dirt is present in the pipes with repeated flushing, they are accepted.

2. 对制冷剂管道系统（除室外机件）应进行气密性试验及真空度试验。

Air-tightness tests and vacuum tests shall be performed on refrigerant pipe systems (except for outdoor units).

当制冷剂为 R22时，管道系统气密性试验压力为 2.8MPa，且需保压 24小时，系统应无泄漏。

When the refrigerant is R22, the pressure for air-tightness test of pipe systems is 2.8MPa, the pressure shall be kept for 24 hours, and the system shall have no leakage.

七、设备安装

Ⅶ. Installation of equipment

1. 设备安装前应按设计要求检验其型号、规格，应有产品合格证和安装使用说明书，核对无误时方能进行安装。

Before the installation of equipment, its model number and specifications shall be checked in accordance with design requirements. The installation can be performed only when the conformity certificate and installation and operation instructions of product are present and they are checked for no error.

安装应按说明书要求进行或由供货商提供指导，吊装时应安全、稳妥，受力点不得使设备产生扭曲变形或损伤。

The installation shall be performed in accordance with the requirements in the instructions or it shall be performed with the directions provided by the supplier. Lifting shall be carried out safely and properly. Force-bearing points shall not lead to the occurrence of distortion, deformation or damage to the equipment.

2. 所有设备安装用的预埋件、预留洞等应与土建施工单位密切配合，避免遗漏和返工。

For the pre-embedded pieces and preformed holes used for the installation of all equipment, the close cooperation with civil work construction unit shall be made to avoid omissions and reworking.

Reference Drawings

Drwg. No.	Title

Revisions

	Name	Date	Notes

巴基斯坦默蒂亚里—拉合尔±660kV直流输电工程

±660kV HVDC Project from Matiari to Lahore in Pakistan

NATIONAL TRANSMISSION & DESPATCH COMPANY (NTDC) LIMITED PAKISTAN

CONTRACTOR　国家电网 STATE GRID　中国电力技术装备有限公司 CHINA ELECTRIC POWER EQUIPMENT AND TECHNOLOGY CO.,LTD.

SUBCONTRACTOR　East China Electric Power Design Institute Co.,Ltd.

拉合尔±660kV换流站

±660kV Lahore Converter Station

设计阶段 PHASE：施工图 Detail Design

M L H V D C - L C S - E C I - D D - H A - 0 2 1 3 - 0 0 1 A

	姓名 Name	日期 Date
设计 Designed	张交芳	
校核 Checked	王新林	
审核 Reviewed	郑刚	
批准 Approved	郑刚	
比例 Scale		图号 DWG NO.

站前区办公楼通风和空调工程设计及施工说明

Ventilation and Air-Conditioning Project Design & Construction Specifications

30-B003701S-N0213-001　版本 REV. A

594X841

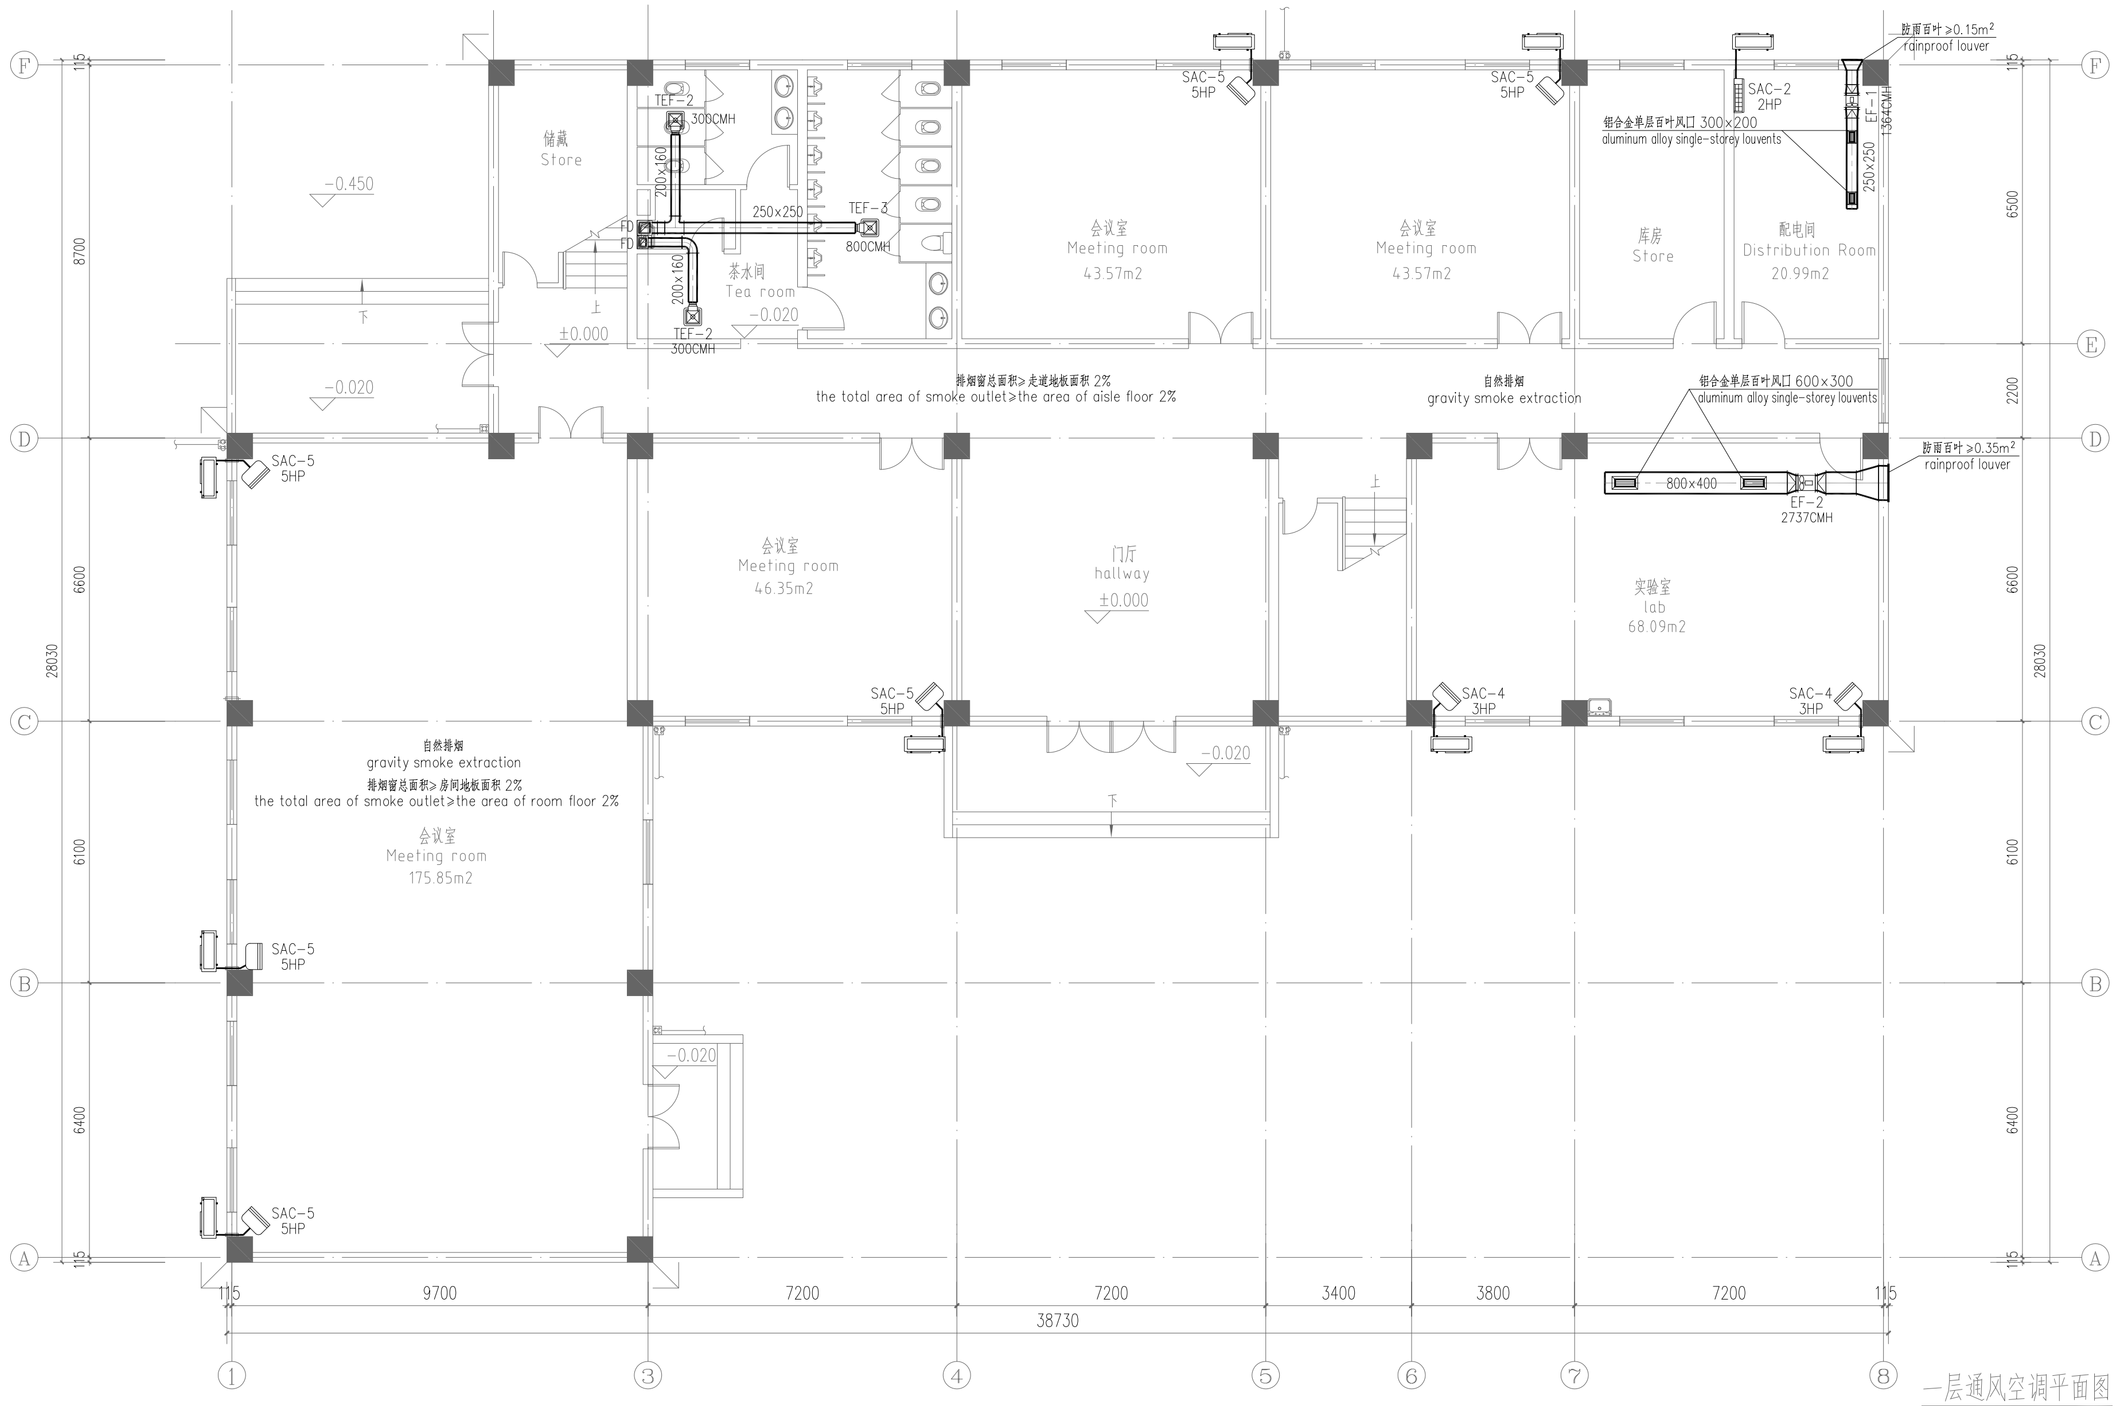

一层通风空调平面图 1:100

Ventilation and Air-Conditioning plan on the First floor

S=672.53m²

配件表：Parts Preferences：

防烟防火阀（70℃ 熔断）	fire damper（70℃ fusing）	250×250	个数 amount	3
防烟防火阀（70℃ 熔断）	fire damper（70℃ fusing）	200×160	个数 amount	3
铝合金单层百叶风口	aluminum alloy single-storey louvents	300×200	个数 amount	2
铝合金单层百叶风口	aluminum alloy single-storey louvents	600×300	个数 amount	2
镀锌钢板	galvanized steel sheet	δ=0.75mm	平方米 m²	3
镀锌钢板	galvanized steel sheet	δ=0.5mm	平方米 m²	50
不锈钢丝网	stainless steel wire	ø1x10x10	平方米 m²	1
冷凝水管（UPVC）	condensate pipe (UPVC)	De25	米 m	45
橡塑保温管壳	rubber and plastic insulation shell	δ=15mm	立方米 m³	0.06
金属软管	flexible metal tubing	ø280	米 m	0.2
金属软管	flexible metal tubing	ø355	米 m	0.2

备注： Note:

1. 排烟窗的设置、防雨百叶、无动力风帽（卫生间排风竖井）的规格及数量见建筑专业图纸；
   The setting of and smoke outlet, the specification and quantity of rainproof louver and power hood are shown in the architectural drawings；
2. 排气扇的面板标高同房间吊顶高度，风机、风管均贴梁底敷设；
   The panel elevation of the hide in ceiling fan is high with the ceiling height of the room, and the axial fan and air duct are all laid on the bottom of the beam；
3. 壁挂式室内机中心距地 2.1m，室外机底高于当层地坪（设备平台）100mm以上；
   The wall hanging type indoor unit center is 2.1 m from the room floor, the bottom of the outdoor unit is higher than the currentfloor (the equipment platform) 100mm above；
4. 空调冷凝水顺坡排至就近地漏或散水；
   The air-conditioner condenses water down the slope to the nearest floor drain or aproll；
5. 设计说明见图纸 B003701S-N0213-001。
   The design description is shown in the drawing B003701S-N0213-001.

分体空调设备性能表：Split air conditioner Preferences：

设备编号 serial number	设备名称 device name	制冷量 capacity kW	制热量 capacity kW	制冷剂 media	室内机 indoor unit 重量 weight kg	室内机 indoor unit 循环风量 air volume m³/h	电源要求 electrical source 输入功率 input power kW	电源要求 electrical source 电源 electrical source ø-V-Hz	电源要求 electrical source 备注 note	套数 amount	备注 note
SAC-2	热泵型壁挂式（家用） Heat pump wall type (household)	5.0	5.6	R22	13.0	800	1.82	1-220-50	配电至内机 power to indoor unit	39	T3 工况 T3 working condition
SAC-4	热泵型柜式（家用） Heat pump cabinet type (household)	7.5	8.3	R22	39.0	1300	2.95	3-380-50	配电至内机 power to indoor unit	2	T3 工况 T3 working condition
SAC-5	热泵型柜式（家用） Heat pump cabinet type (household)	12.0	13.0	R22	51.0	1800	4.13	3-380-50	配电至内机 power to indoor unit	6	T3 工况 T3 working condition

风机性能表：Draught fan Preferences:

设备编号 serial number	服务区域 service area	风机形式 device form	参考型号 mode	驱动形式 Drive form	风量 flow m³/h	全压/静压 Total/Static pressure Pa	电机功率 power kW	电源 electrical source ø-V-Hz	应急电源 emergency electricity	减振方式 vibration isolation	台数 amount	备注 note
EF-1	配电间 distribution room	轴流风机 axial fan	T35-11-2.8	直接传动 Direct drive	1364	45	0.025	3-380-50	无 N	S	1	
EF-2	实验室 lab	轴流风机 axial fan	T35-11-3.55	直接传动 Direct drive	2737	71	0.09	3-380-50	无 N	S	1	

注：1.减振方式中，R表示橡胶类隔振方式，S表示弹簧隔振方式。 note：Vibration mode S：Spring vibration isolation. Vibration mode R：Rubber vibration isolation

排气扇性能表：hide in ceiling fan Preferences：

设备编号 serial number	服务区域 service area	风机形式 device form	参考型号 mode	驱动形式 drive form	风量 flow m³/h	全压/静压 Total/Static pressure Pa	最低效率 lowest efficiency %	转速 rotate speed rpm	电机功率 power kW	单位风量耗功率 power consumption of unit flow W/(m³/h)	电源 electrical source ø-V-Hz	运行重量 weight kg	机组噪声 noise dB(A)	应急电源 emergency electricity	台数 amount	备注 note
TEF-2	卫生间 toilet	排风扇 hide in ceiling fan		直接传动 Direct drive	300	--/30	≥52	--	0.06	--	1-220-50	6.5	≤46	--	6	自带止回阀 With check valve
TEF-3	卫生间、茶水间 toilet、tea room	排风扇 hide in ceiling fan		直接传动 Direct drive	800	--/50	≥52	--	0.15	--	1-220-50	10.0	≤58	--	3	自带止回阀 With check valve

图例 legend

SAC	分体空调室外机（侧出风） outdoor unit (sideward)
SAC	分体空调室内机（壁挂式） indoor unit (wall type)
SAC	分体空调室内机（柜式） indoor unit (cabinet type)
TEF	天花板管道式换气扇 hide in ceiling fan
FD	防烟防火阀（70℃ 熔断）就地手动开、关，输出信号 fire damper (70℃ fusing) Manually open, close in place, output signal
EF	轴流风机 axial fan

北

Reference Drawings

Drwg. No.	Title

Revisions

Name	Date	Notes

巴基斯坦默蒂亚里—拉合尔±660kV直流输电工程

±660kV HVDC Project from Matiari to Lahore in Pakistan

NATIONAL TRANSMISSION & DESPATCH COMPANY (NTDC) LIMITED PAKISTAN

CONTRACTOR 国家电网 STATE GRID 中国电力技术装备有限公司 CHINA ELECTRIC EQUIPMENT GROUP CO.,LTD.

SUBCONTRACTOR East China Electric Power Design Institute Co.,Ltd.

拉合尔±660kV换流站

±660kV Lahore Converter Station

设计阶段 PHASE：施工图 Detail Design

M L H V D C - L C S - E C I - D D - H A - 0 2 1 3 - 0 0 2 A

	姓名 Name	日期 Date
设计 Designed		
校核 Checked		
审核 Reviewed		
批准 Approved		

站前区办公楼—层通风空调平面图

Office building Ventilation and Air-Conditioning plan on the First floor

专业 Speciality	会签 Sign	日期 Date
结构 Structure		
电气 Electrical		
暖通 HVAC		
给排水 Water supply and drainage		

比例 Scale 1:100 | 图号 DWG NO. 30-B003701S-N0213-002 | 版本 REV. A

594X841

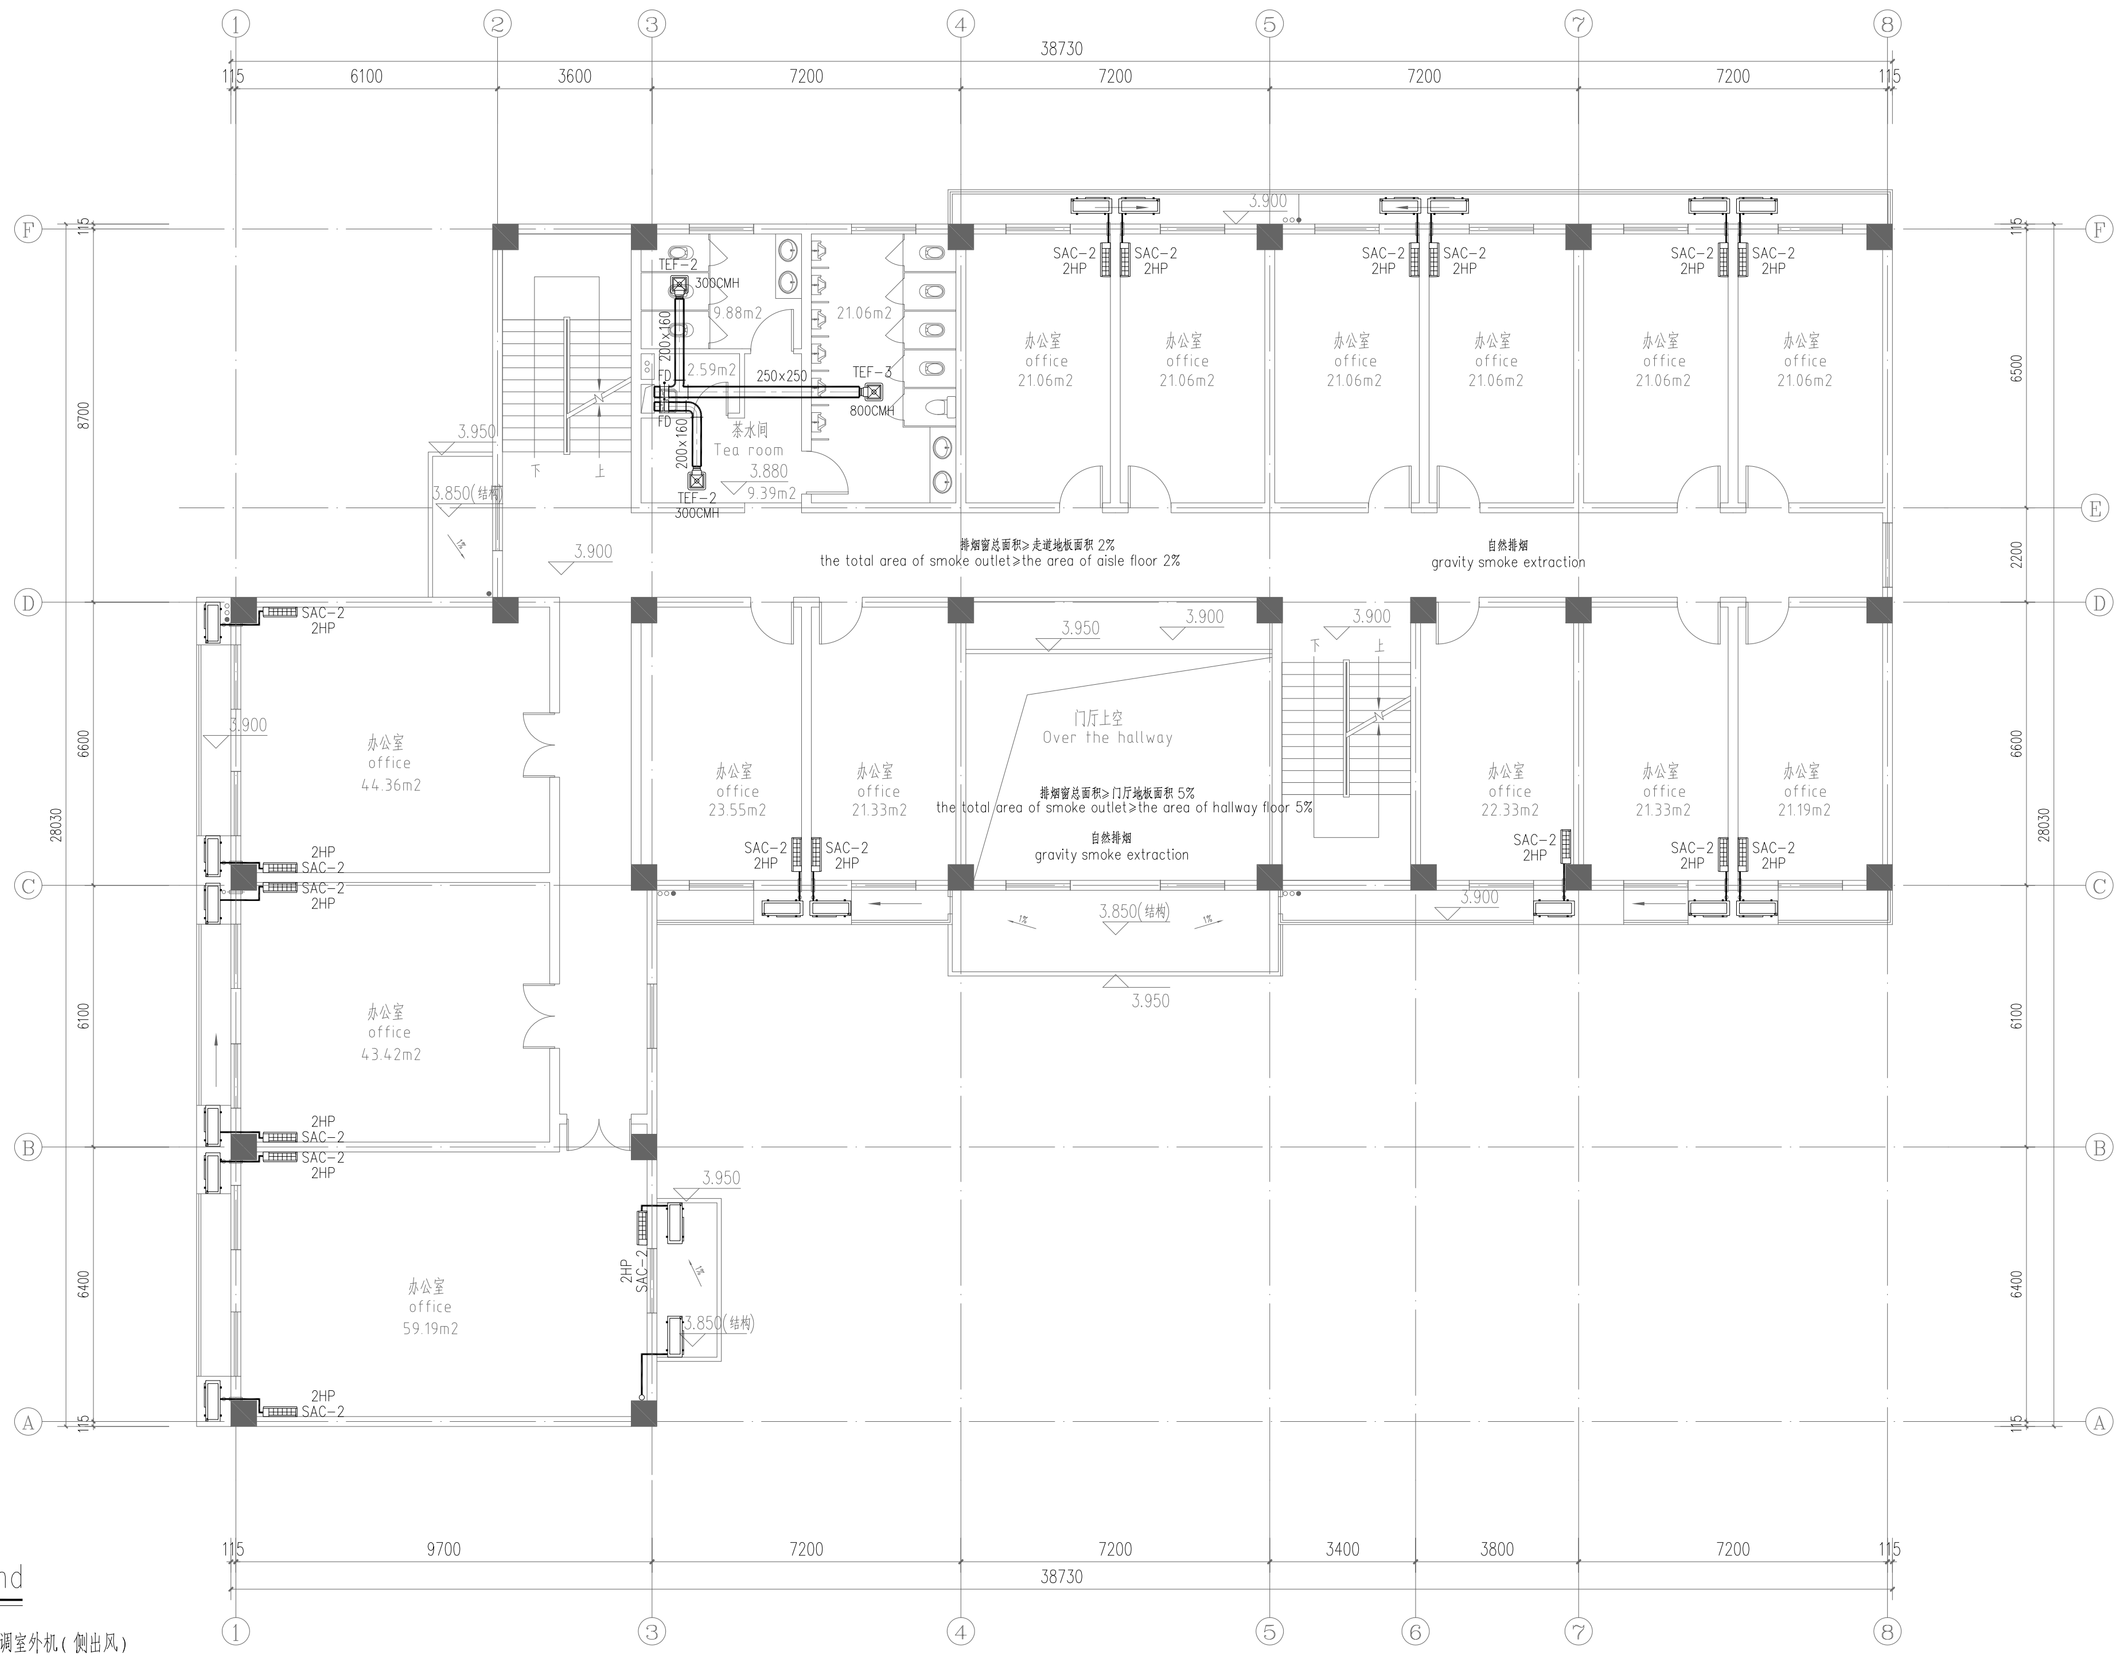

图例 legend

SAC	分体空调室外机(侧出风) outdoor unit (sideward)
SAC	分体空调室内机(壁挂式) indoor unit (wall type)
SAC	分体空调室内机(柜式) indoor unit (cabinet type)
TEF	天花板管道式换气扇 hide in ceiling fan
FD	防烟防火阀(70℃ 熔断)就地手动开、关,输出信号 fire damper (70℃ fusing) Manually open, close in place, output signal
EF	轴流风机 axial fan

二层通风空调平面图 1:100

Ventilation and Air-Conditioning plan on the Second floor

S=627.17m²

备注: Note:

1. 排烟窗的设置、防雨百叶、无动力风帽(卫生间排风竖井)的规格及数量见建筑专业图纸;
   The setting of and smoke outlet, the specification and quantity of rainproof louver and power hood are shown in the architectural drawings;
2. 排气扇的面板标高同房间吊顶高度,风机、风管均贴梁底敷设;
   The panel elevation of the hide in ceiling fan is high with the ceiling height of the room, and the axial fan and air duct are all laid on the bottom of the beam;
3. 壁挂式室内机中心距地 2.1m,室外机底高于当层地坪(设备平台)100mm以上;
   The wall hanging type indoor unit center is 2.1 m from the room floor, the bottom of the outdoor unit is higher than the currentfloor (the equipment platform) 100mm above;
4. 空调冷凝水顺坡排至就近地漏或散水;
   The air-conditioner condenses water down the slope to the nearest floor drain or aproll;
5. 设计说明见图纸 B003701S-N0213-001。
   The design description is shown in the drawing B003701S-N0213-001.

Reference Drawings

Drwg. No.	Title

Revisions

	Name	Date	Notes

巴基斯坦默蒂亚里—拉合尔±660kV直流输电工程

±660kV HVDC Project from Matiari to Lahore in Pakistan

NATIONAL TRANSMISSION & DESPATCH COMPANY (NTDC) LIMITED PAKISTAN

CONTRACTOR 国家电网 STATE GRID 中国电力技术装备有限公司 CHINA ELECTRIC EQUIPMENT TECHNOLOGY CO.,LTD.

SUBCONTRACTOR East China Electric Power Design Institute Co.,Ltd.

拉合尔±660kV换流站

±660kV Lahore Converter Station

设计阶段 PHASE: 施工图 Detail Design

M L H V D C - L C S - E C I - D D - H A - 0 2 1 3 - 0 0 3 A

	姓名 Name	日期 Date
设计 Designed	张父芳	
校核 Checked	牛彩林	
审核 Reviewed	郑坤	
批准 Approved	郑坤	

站前区办公楼二层通风空调平面图

Office building Ventilation and Air-Conditioning plan on the Second floor

专业 Speciality	会签 Sign	日期 Date
结构 Structure		
电气 Electrical		
暖通 HVAC		
给排水 Water supply and drainage		

比例 Scale: 1:100 | 图号 DWG NO.: 30-B003701S-N0213-003 | 版本 REV.: A

594X841

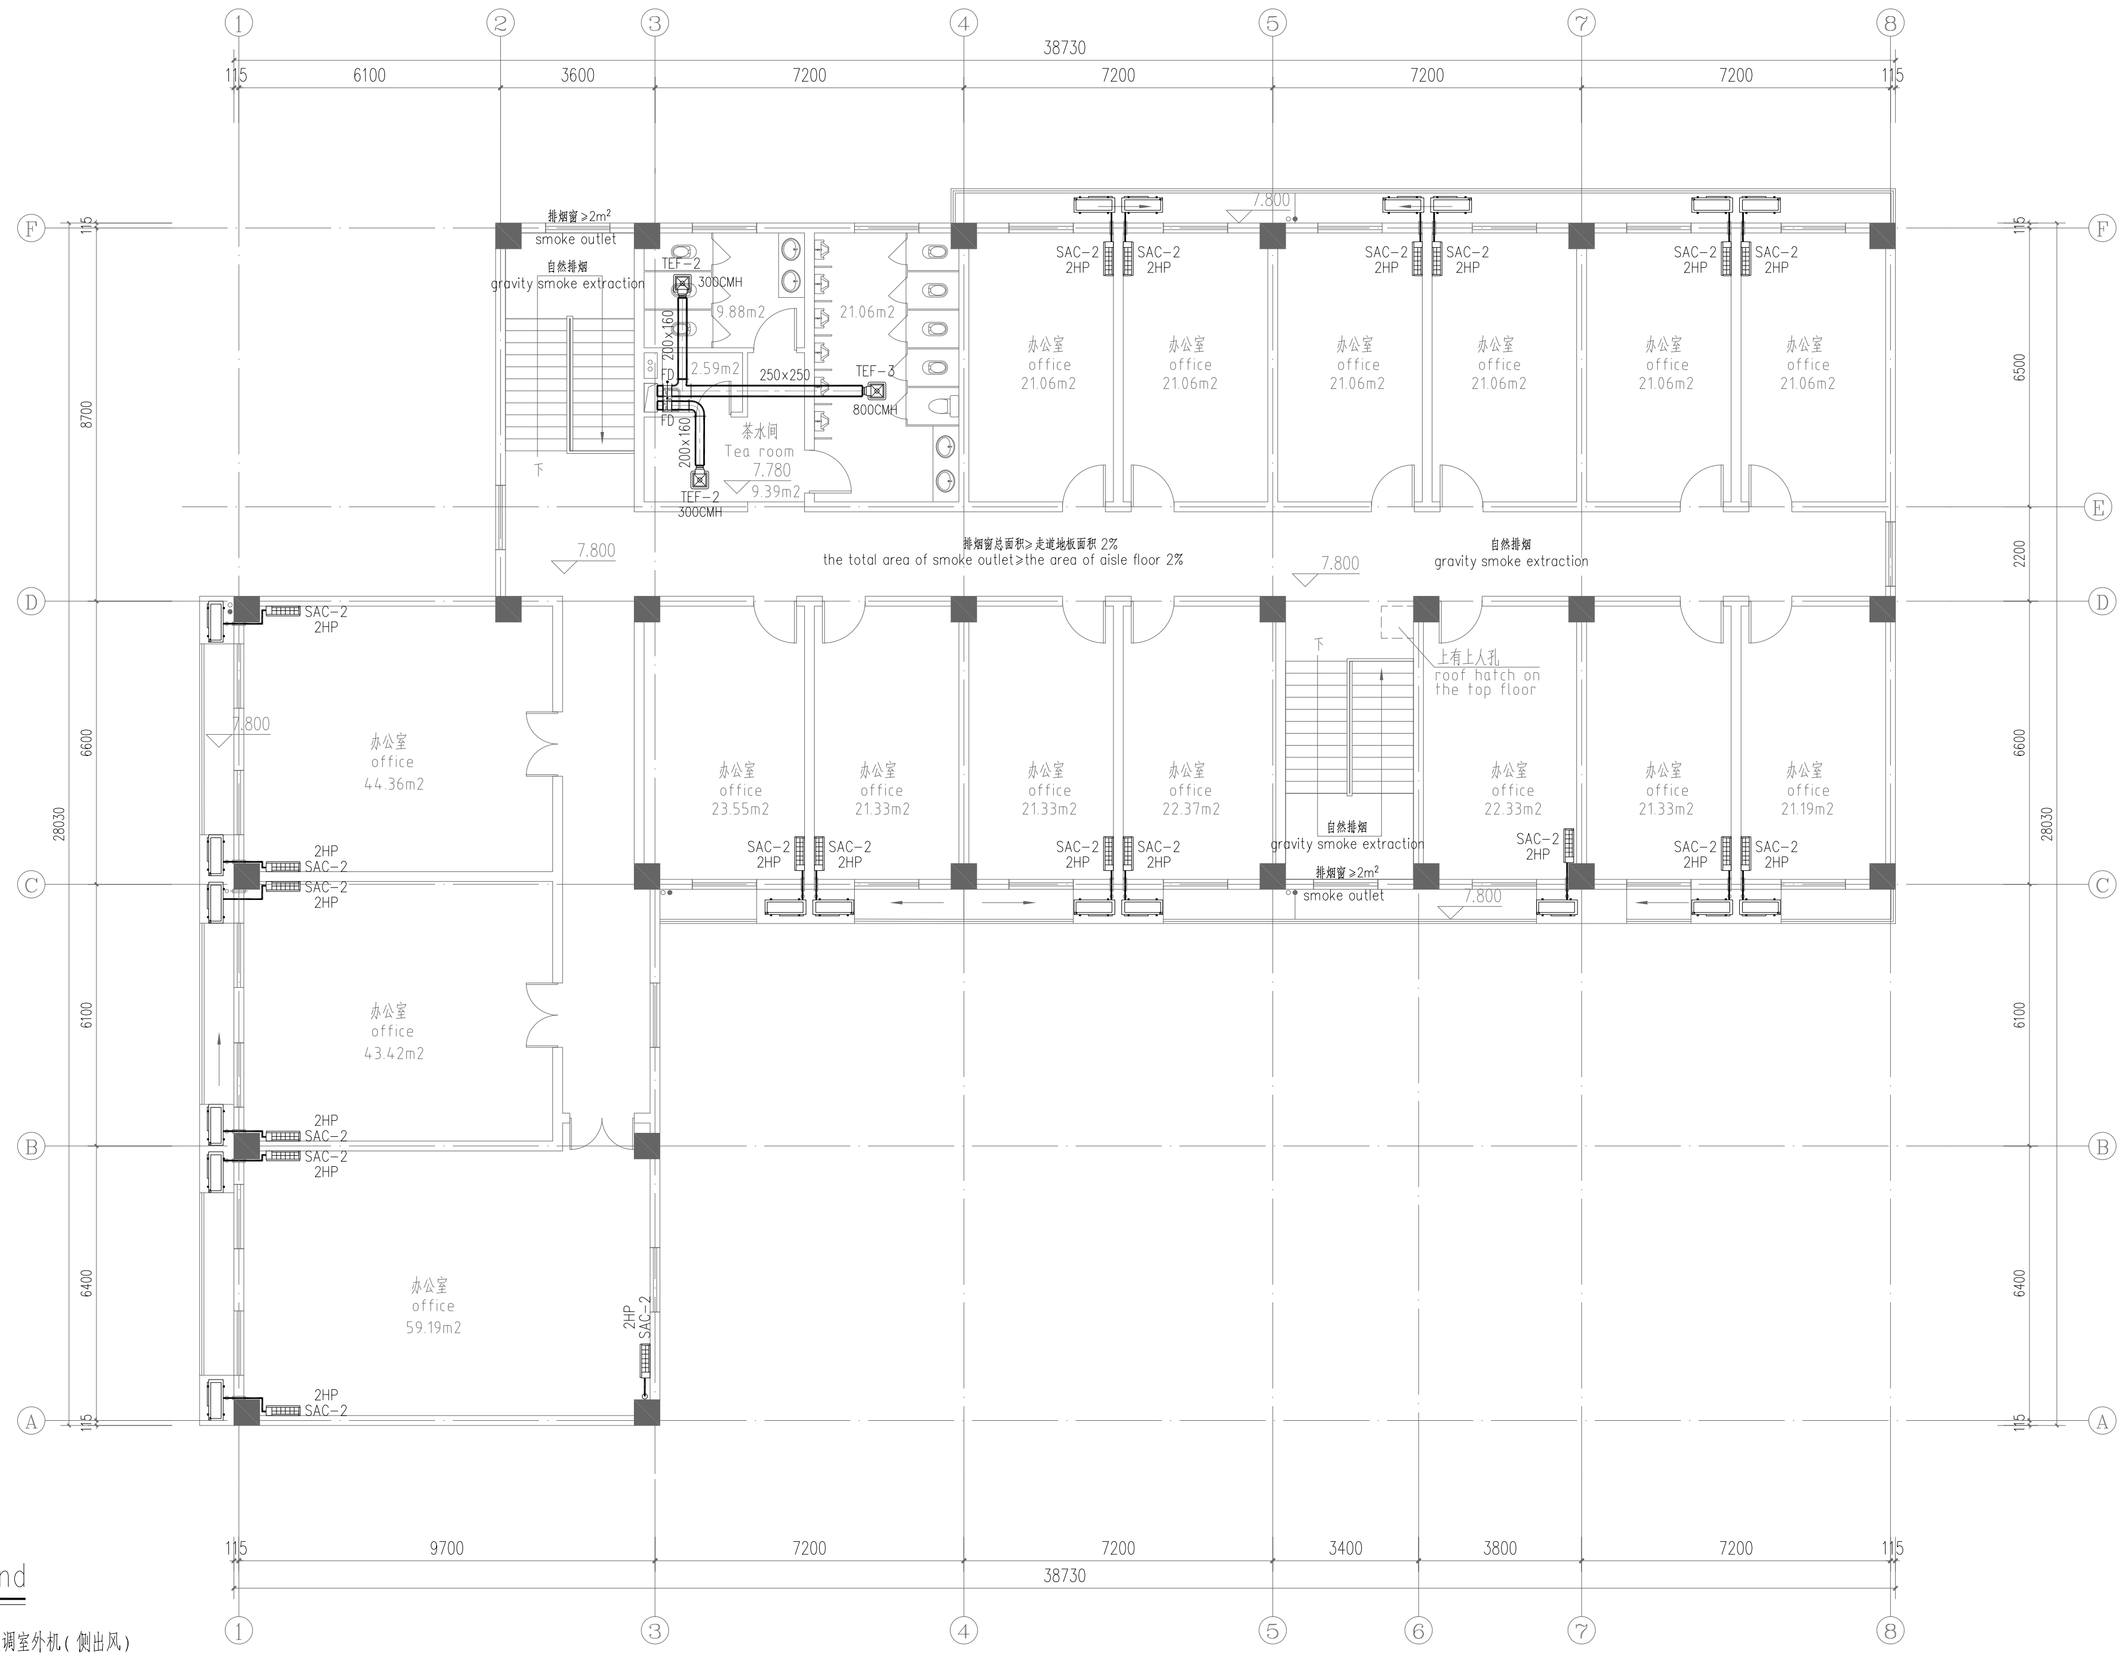

备注： Note:

1. 排烟窗的设置、防雨百叶、无动力风帽（卫生间排风竖井）的规格及数量见建筑专业图纸；
   The setting of and smoke outlet, the specification and quantity of rainproof louver and power hood are shown in the architectural drawings；
2. 排气扇的面板标高同房间吊顶高度，风机、风管均贴梁底敷设；
   The panel elevation of the hide in ceiling fan is high with the ceiling height of the room, and the axial fan and air duct are all laid on the bottom of the beam；
3. 壁挂式室内机中心距地 2.1m，室外机底高于当层地坪（设备平台）100mm以上；
   The wall hanging type indoor unit center is 2.1 m from the room floor, the bottom of the outdoor unit is higher than the currentfloor (the equipment platform) 100mm above；
4. 空调冷凝水顺坡排至就近地漏或散水；
   The air-conditioner condenses water down the slope to the nearest floor drain or aproll；
5. 设计说明见图纸 B003701S-N0213-001。
   The design description is shown in the drawing B003701S-N0213-001.

图例 legend

SAC	分体空调室外机（侧出风） outdoor unit (sideward)
SAC	分体空调室内机（壁挂式） indoor unit (wall type)
SAC	分体空调室内机（柜式） indoor unit (cabinet type)
TEF	天花板管道式换气扇 hide in ceiling fan
FD	防烟防火阀（70℃ 熔断）就地手动开、关，输出信号 fire damper (70℃ fusing) Manually open, close in place, output signal
EF	轴流风机 axial fan

三层通风空调平面图 1:100

Ventilation and Air-Conditioning plan on the Third floor

S=672.53m²

Reference Drawings

Drwg. No.	Title

Revisions

	Name	Date	Notes

巴基斯坦默蒂亚里—拉合尔±660kV直流输电工程

±660kV HVDC Project from Matiari to Lahore in Pakistan

NATIONAL TRANSMISSION & DESPATCH COMPANY (NTDC) LIMITED PAKISTAN

CONTRACTOR 国家电网 STATE GRID 中国电力技术装备有限公司 CHINA ELECTRIC POWER EQUIPMENT AND TECHNOLOGY CO.,LTD.

SUBCONTRACTOR East China Electric Power Design Institute Co.,Ltd.

拉合尔±660kV换流站

±660kV Lahore Converter Station

设计阶段 PHASE: 施工图 Detail Design

M L H V D C - L C S - E C I - D D - H A - 0 2 1 3 - 0 0 4 A

	姓名 Name	日期 Date
设计 Designed	张交芳	
校核 Checked	王新林	
审核 Reviewed	李加坤	
批准 Approved	李加坤	

站前区办公楼三层通风空调平面图

Office building Ventilation and Air-Conditioning plan on the Third floor

专业 Speciality	会签 Sign	日期 Date
结构 Structure		
电气 Electrical		
暖通 HVAC		
给排水 WAT.SUPPLY AND DRAINAGE		

比例 Scale: 1:100 | 图号 DWG NO.: 30-B003701S-N0213-004 | 版本 REV.: A

594X841