卷册检索号 SEARCH NO. OF THE VOLUME
MLHVDC-LCS-ECI-DD-SG-0406 30-B003701S-S0406

第 1 页 PAGE　　共 1 页 OF

图纸文件目录（首页）

CATALOG OF DRAWING DOCUMENTS (HEAD PAGE)

拉合尔±660kV换流站 ±660kV Lahore Converter Station 工程 PROJECT　施工图 Detail Design 阶段 DESIGN STAGE

水布 Hydraulic 专业 SPECIALITY　第 04 卷 VOLUME　第 06 册 BOOK

卷册名称 Volume name　阀冷系统排水池与管道布置图 Valve cooling system drainage pool and pipeline layout

批　准 APPROVED BY	
审　核 REVIEWED BY	
设计/勘测 DESIGNED BY/ SURVEYED BY	段叶青
图 纸 DRAWING 3 张 NOS.	打印件 PRINTED COPIES 0 本 NOS.

序号 No.	图　号 DRAWING NO.	文件名称 DOCUMENT TITLE	版本 EDITION	张 NOS.	本 NOS.	备注 REMARKS
1	30-B003701S-S0406-001	阀冷废水排水池平、剖面布置图	A	1		
		Valve cooling system wastewater drainage pool layout and section plan				
2	30-B003701S-S0406-002	阀冷废水管道布置图	A	1		
		Valve cooling system waste water pipeline layout				
3	30-B003701S-S0406-003	阀冷废水排放系统材料表	A	1		
		Bill Of Material For Valve cooling wastewater discharge system				
4						
5						
6						
7						
8						
9						

注:

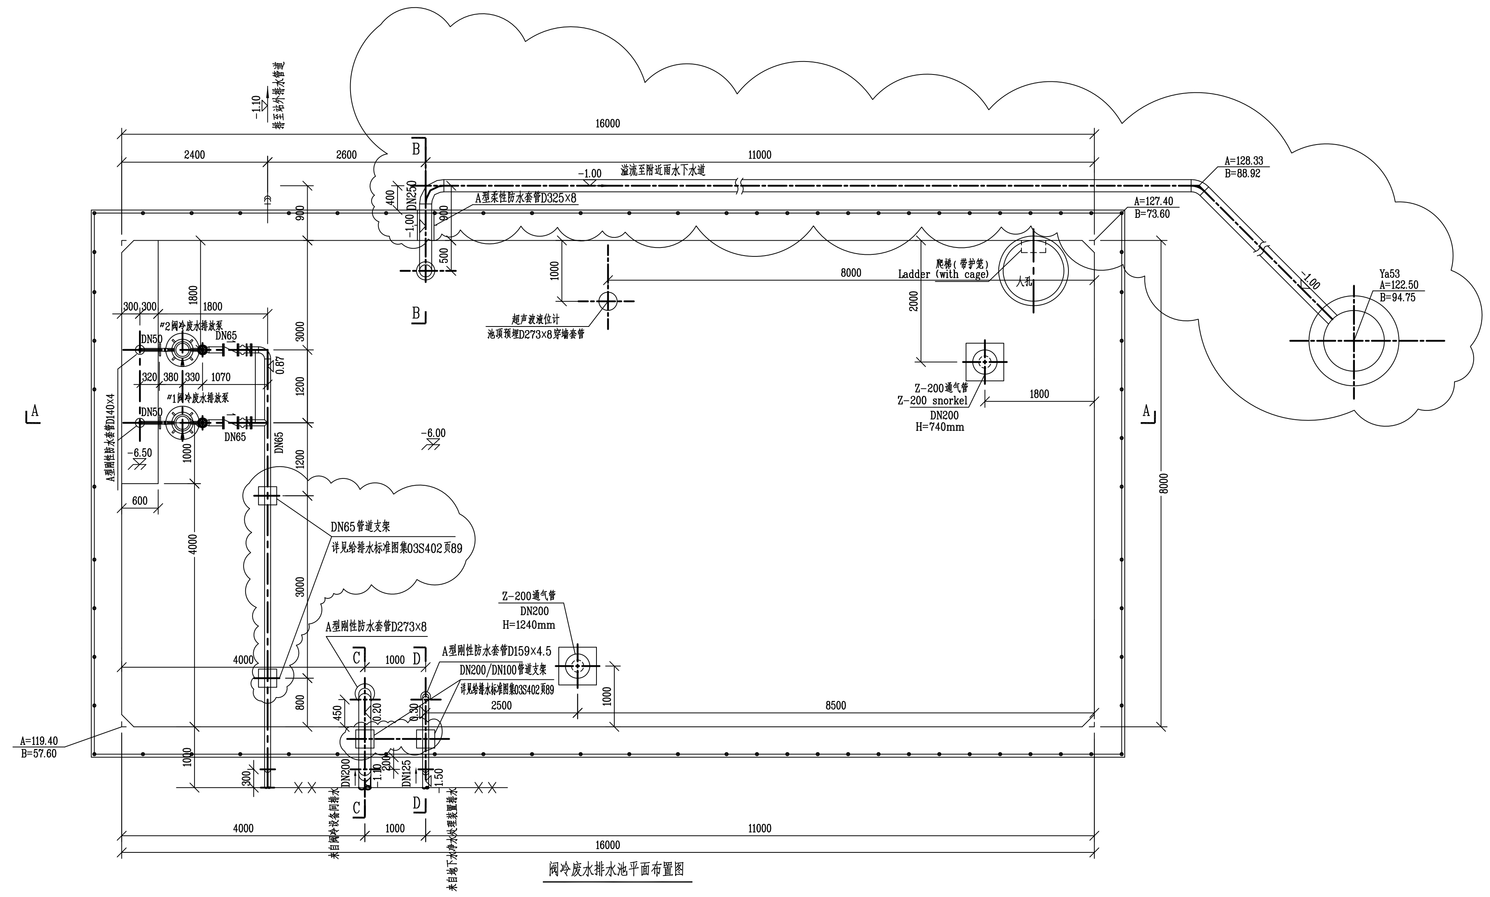

阀冷废水排水池平面布置图

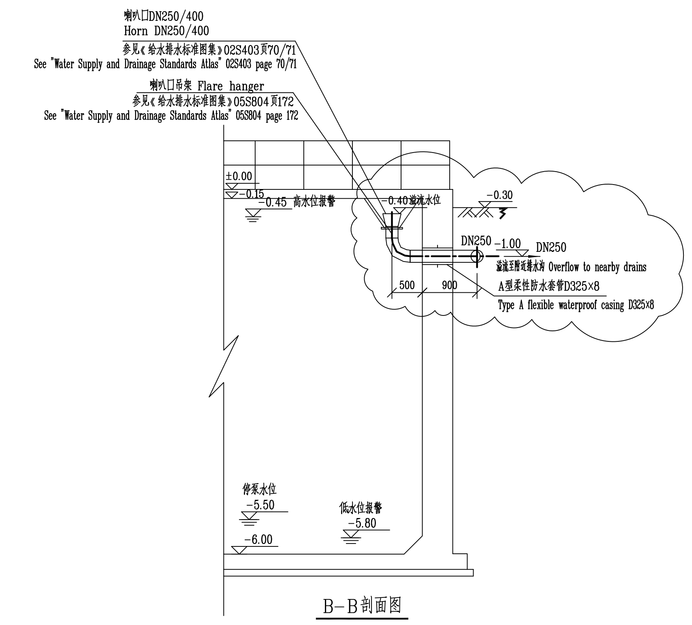

B-B剖面图

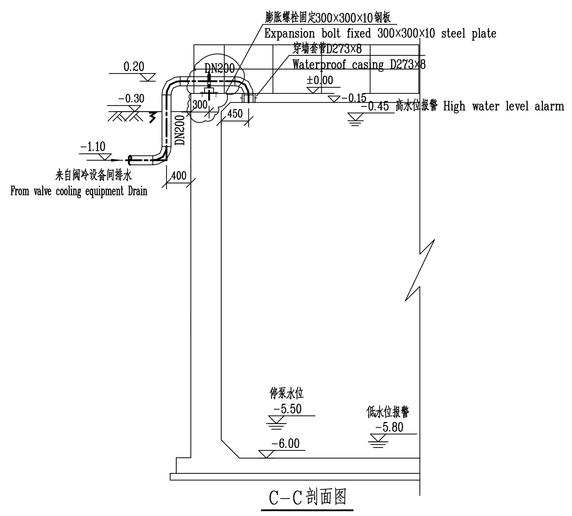

C-C剖面图

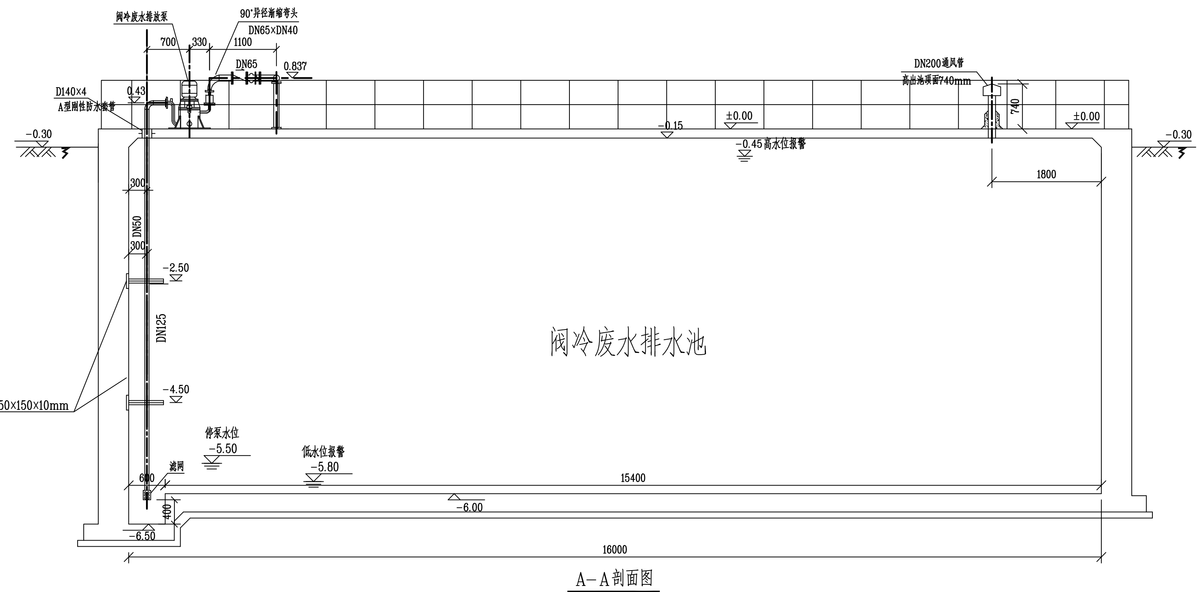

A-A剖面图

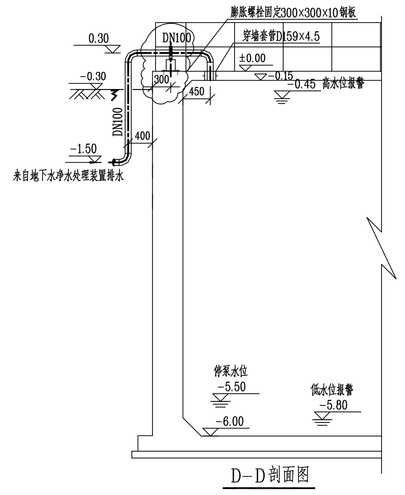

D-D剖面图

阀冷废水排放泵

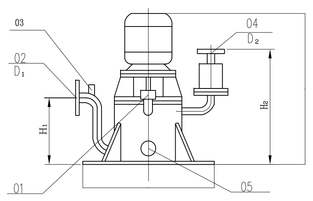

01 引 流 口 draft opening
02 吸 液 口 suction mouth
04 出 液 口 liquid outlet
05 放 空 口 empty outlet

03 电控阀蝶接头
The screw thread connectors of electromotion Valves

泵净重 150kg， 运行重量230kg。
泵底座无需螺栓安装，直接放置平台即可，无螺栓孔。



阀冷废水排放泵参数表
Pump parameter table

规格型号 Specification&Model	安装尺寸(mm) Mounting size(mm)						外形尺寸(mm) External size(mm)	
	H1	H2	L1	L2	D1	D2	H	D
2G50WFB-B1	430	630	380	330	50	40	1070	650
Q=20m3/h H=40m N=15kw								

说明：
1. 本图坐标采用站区坐标系统，站区坐标系统与巴基斯坦UTM-43N平面坐标系的换算公式详见土建相关卷册。标高单位以m计,尺寸单位以mm计。
2. 本图采用相对标高，标高±0.00m相当于EGM2008高程系统193.70m，室外场地平均标高为-0.30m。
3. 阀冷废水排放泵采用自吸泵，按本图布置位置就地安装。参照靖江市天力泵业有限公司提供的资料检验（合同已定）。
4. 阀冷废水排放管道工作压力为0.40MPa，试验压力为0.9MPa，管道施工要求详见本工程SD403卷册。
5. 现场深度基水泵封堵应以实际尺寸进行核对后再行安装，水池满后溢流入附近雨水下水道。
6. 阀冷废水排水池有效容积V=600m³。

Notes：
1. The coordinates of this map adopt the station area coordinate system. The conversion formula of the station area coordinate system and the Pakistan UTM-43N plane coordinate system is detailed in the civil engineering related volume book. The unit of elevation is in m and the unit of measure is in mm.
2. This figure adopts the relative elevation, the elevation is ±0.00m, which is equivalent to 193.70m of EGM2008 elevation system, and the average elevation of outdoor venue is -0.30m.
3. The valve cold waste water discharge pump uses a self-priming pump. Install the location in place as shown in this figure. Refer to the information provided by Jingjiang TianLi Pump Co.,Ltd.(the contract has been fixed).
4. The working pressure of the valve cold waste water discharge pipe is 0.40MPa and the test pressure is 0.9MPa. Requirements of piping construction refers to volume SD403.
5. The site must be checked according to the actual size of the pump after it arrives. After the pool is full, it overflows into the nearby rainwater channel.
6. The effective volume of the valve cold waste water drain tank is V=600m³.

Reference Drawings

Drwg. No.	Title

Revisions

Name	Date	Notes

巴基斯坦莫哈蒂亚里—拉合尔±660kV直流输电工程
±660kV HVDC Project from Matiari to Lahore in Pakistan

NATIONAL TRANSMISSION & DESPATCH COMPANY (NTDC) LIMITED PAKISTAN

CONTRACTOR 国家电网 State Grid 中国电力技术装备有限公司

SUBCONTRACTOR East China Electric Power Design Institute Co.,Ltd.

拉合尔±660kV换流站
±660kV Lahore Converter Station

设计阶段 PHASE: 施工图 Detail Design

M L H V D C - L C S - E C I - D D - S G - 0 4 0 6 - 0 0 1 A

	姓名 Name	日期 Date
设计 Designed		
校核 Checked		
审核 Reviewed		
批准 Approved		

阀冷废水排水池平、剖面布置图
Valve cooling system wastewater drainage pool layout and section plan

比例 Scale 1:50 | 图号 DWG NO. 30-B003701S-S0406-001 | 版本 REV. A

841X1189

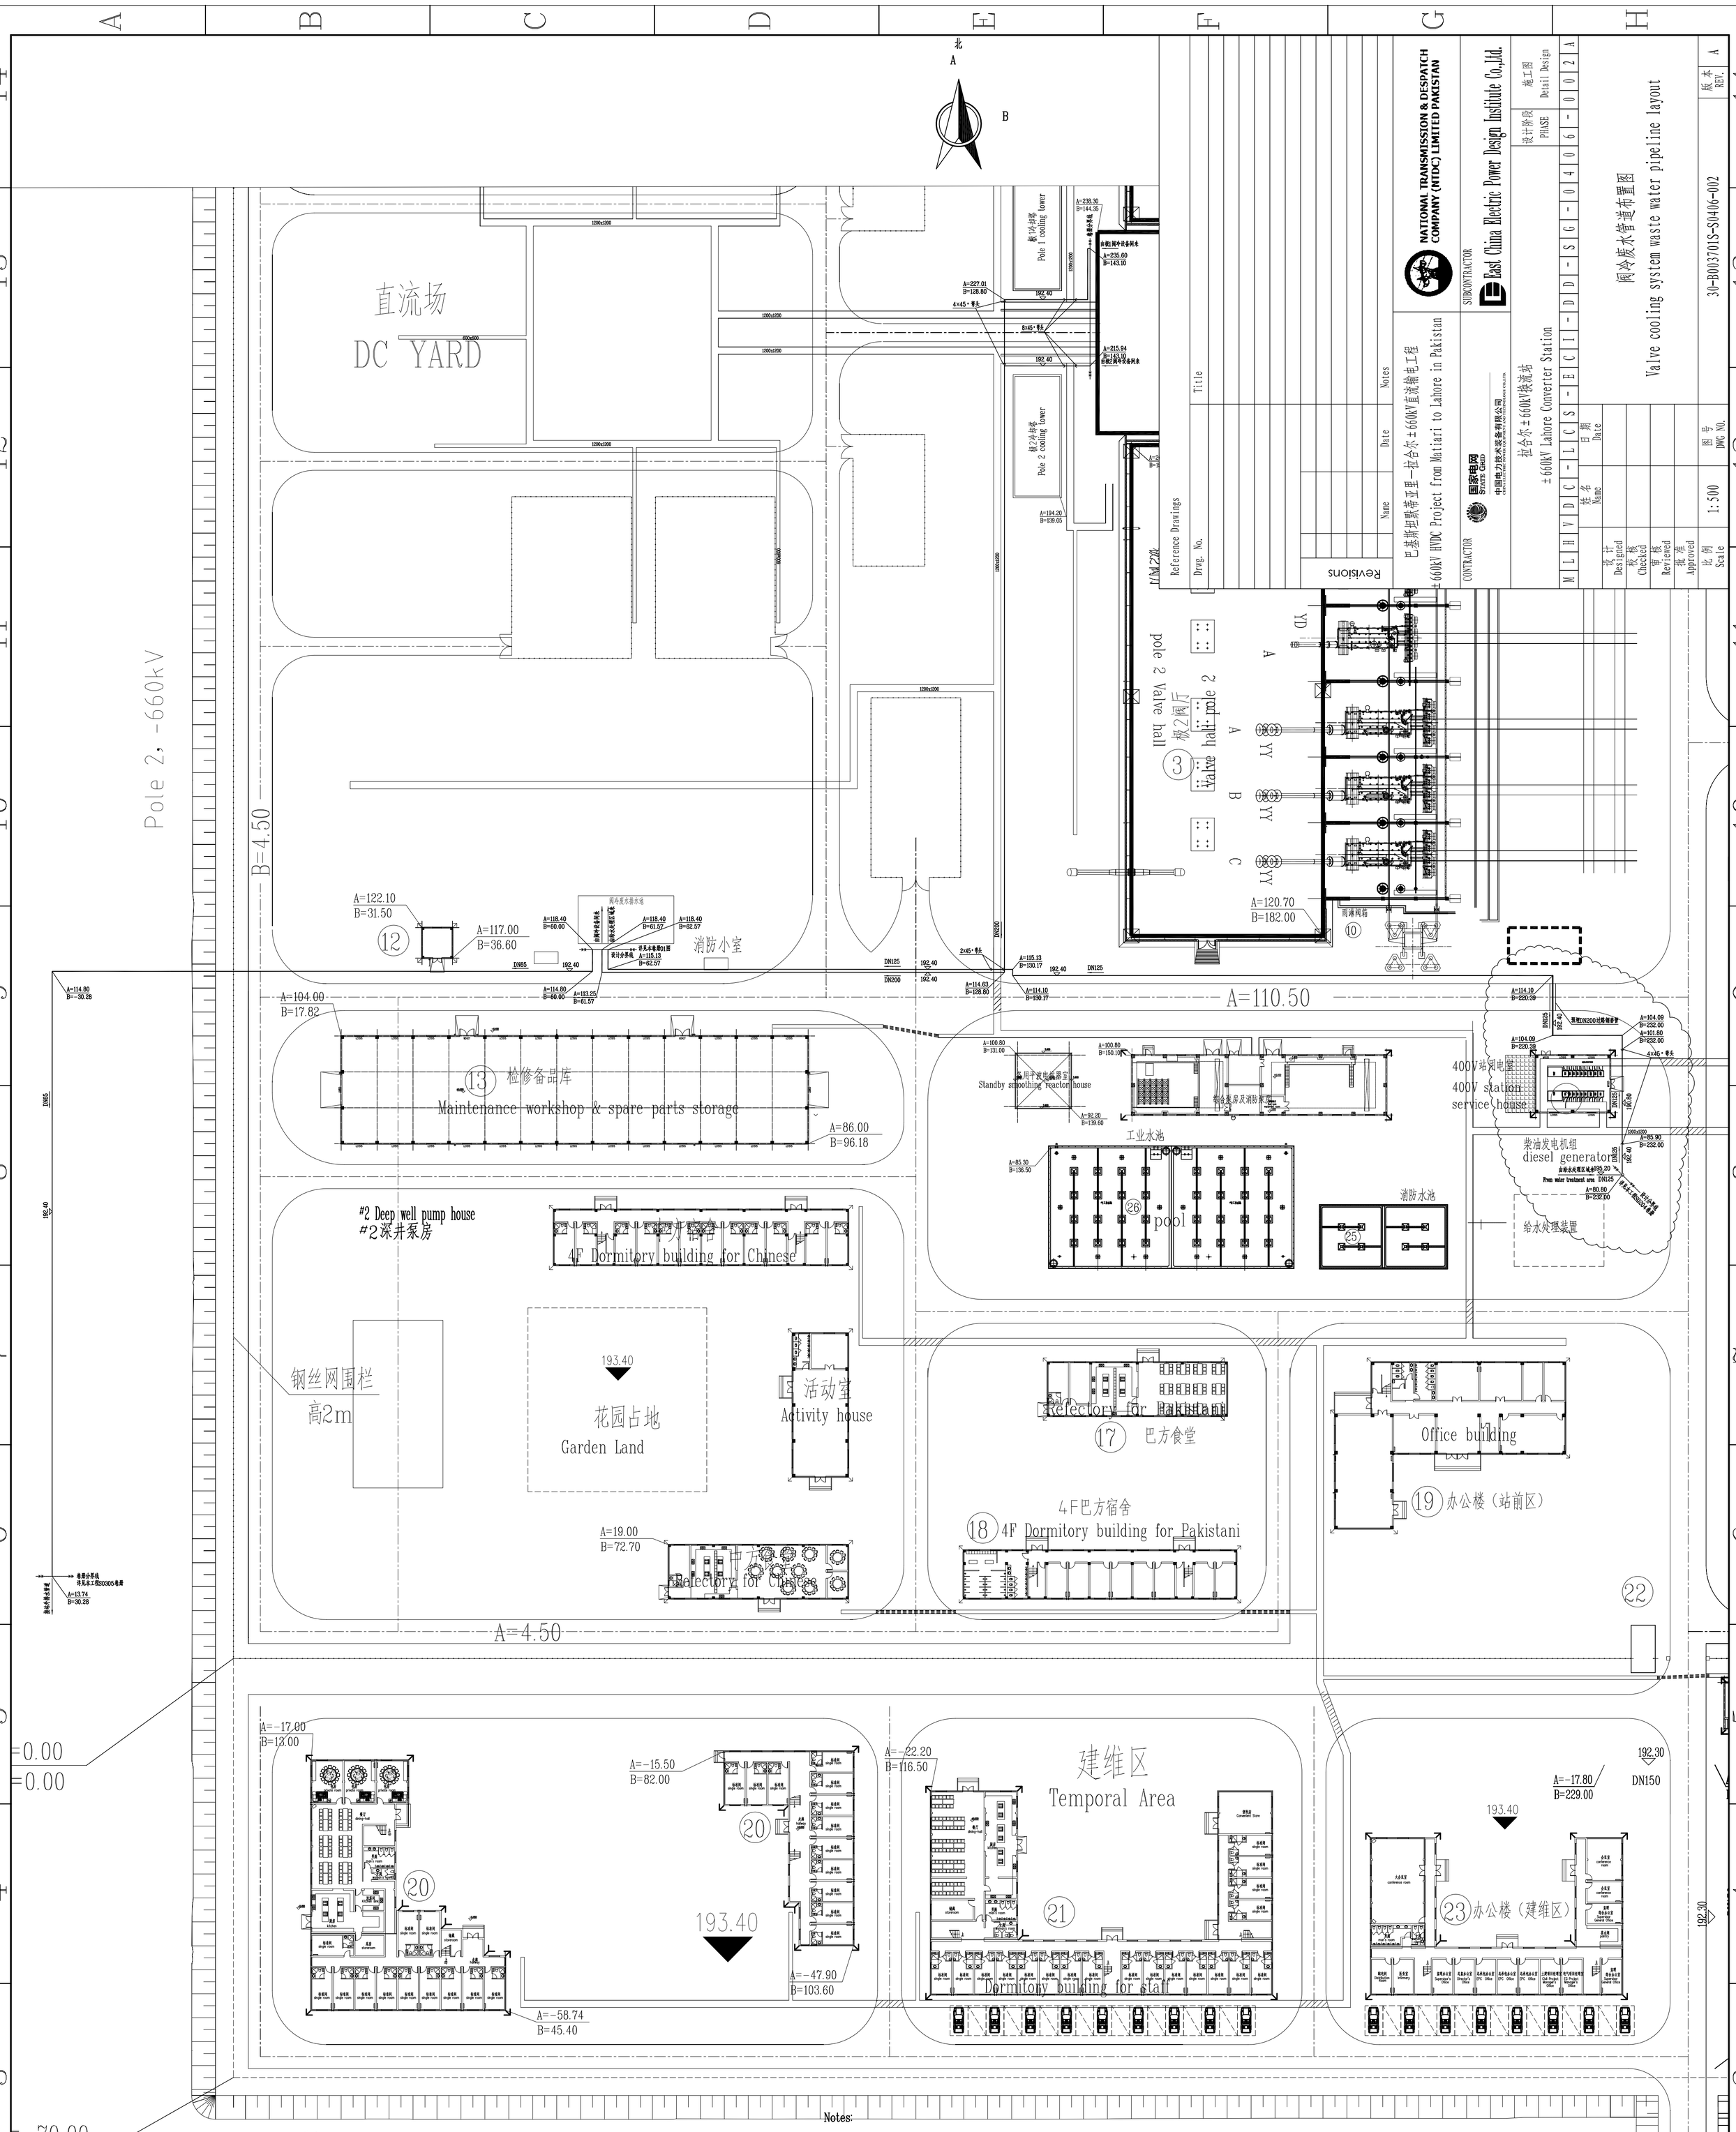

说明:

1.本图高程采用EGM2008高程系统，坐标采用站区建筑（A、B）坐标系统，与巴基斯坦UTM-43N平面坐标系关系如下所示:

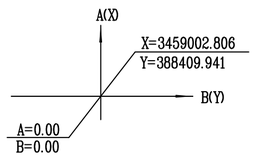

2.图中高程以及平面坐标以米（m）为单位，尺寸以毫米（mm）为单位。

3.场地平均设计标高为193.40m，站内道路为郊区型道路，道路中心标高193.60m。

4.由于地下水处理方案未确定，补充水管的布置方案为暂定。

5.阀冷废水采用钢衬塑管，相关说明详见本工程S0204-01图。

Notes:

1.EGM2008 elevation is adopted in this volume,The station coordinate(AB) is adopted in this volume,station coordinate and UTM-43N system conversion formula shows as follow:

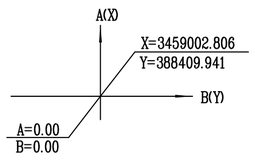

2.Unit of coordinate and elevation is m,that of dimensions are in mm.

3.Average elevation of outdoor ground is 193.40m.Station road adopts suburban road type,elevation of road center is 193.60m.

4.As the groundwater treatment process is uncertain, the arrangement of make-up water pipe is tentative.

5.The valve cooling system wastewater is made of steel-lined plastic pipe. For details, please refer to S0204-01 of this project.

Reference Drawings

Drwg. No.	Title

Revisions

Name	Date	Notes

NATIONAL TRANSMISSION & DESPATCH COMPANY (NTDC) LIMITED PAKISTAN

巴基斯坦默蒂亚里—拉合尔±660kV直流输电工程
±660kV HVDC Project from Matiari to Lahore in Pakistan

CONTRACTOR: 国家电网 STATE GRID 中国电力技术装备有限公司 CHINA ELECTRIC EQUIPMENT GROUP CO.,LTD.

SUBCONTRACTOR: East China Electric Power Design Institute Co.,Ltd.

拉合尔±660kV换流站
±660kV Lahore Converter Station

M L H V D C - L C S - E C I - D D - S G - 0 4 0 6 - 0 0 2 A

设计阶段 PHASE: 施工图 Detail Design

阀冷废水管道布置图
Valve cooling system waste water pipeline layout

	姓名 Name	日期 Date
设计 Designed		
校核 Checked		
审核 Reviewed		
批准 Approved		

比例 Scale: 1:500

图号 DWG NO.: 30-B003701S-S0406-002

版本 REV.: A

594X841

编号 No.	名 称 Name	规 格 Parameters	单位 Unit	数量	材料 Material	单 重 Single	总 重 Total	参考图号及备注 Remark
						重量Weight		
19	Steel plate 钢底板	500x500x10	Set 块	1	Q235a			
18	Tee joint 三通	DN200	Set 只	1	Q235a lining plastic Q235a衬塑			
17	45° Elbow 45°弯头	DN200	Set 只	12	Q235a lining plastic Q235a衬塑	–	–	
16	45° Elbow 45°弯头	DN125	Set 只	8	Q235a lining plastic Q235a衬塑	–	–	
15	45° Elbow 45°弯头	DN250	Set 只	1	Q235a lining plastic Q235a衬塑	–	–	
14	90° Elbow 90°弯头	DN250	Set 只	2	Q235a lining plastic Q235a衬塑	–	–	
13	90° Elbow 90°弯头	DN200	Set 只	5	Q235a lining plastic Q235a衬塑	–	–	
12	90° Elbow 90°弯头	DN125	Set 只	10	Q235a lining plastic Q235a衬塑	–	–	
11	90° Elbow 90°弯头	DN65	Set 只	2	Q235a lining plastic Q235a衬塑	–	–	
10	90° Elbow 90°弯头	DN50	Set 只	2	Q235a lining plastic Q235a衬塑	–	–	
9	Steel Pipe lined with plastics 衬塑镀锌钢管	DN250 , PN16	m 米	100	Q235a lining plastic Q235a衬塑	–	–	
8	Steel Pipe lined with plastics 衬塑镀锌钢管	DN200 , PN16	m 米	300	Q235a lining plastic Q235a衬塑	–	–	
7	Steel Pipe lined with plastics 衬塑镀锌钢管	DN125 , PN16	m 米	230	Q235a lining plastic Q235a衬塑	–	–	
6	Steel Pipe lined with plastics 衬塑镀锌钢管	DN65 , PN16	m 米	220	Q235a lining plastic Q235a衬塑	–	–	
5	Steel Pipe lined with plastics 衬塑镀锌钢管	DN50 , PN16	m 米	20	Q235a lining plastic Q235a衬塑	–	–	
4	Double flange power transmission joint 双法兰传力接头	DN65 , PN10	Set 只	2		–	–	
3	Butterfly valve 蝶 阀	DN65 , PN10	Set 个	2		–	–	
2	Microresistance slow closing check valve 微阻缓闭止回阀	DN65 , PN10	Set 个	2		–	–	
1	Valve cooling system waste water discharge pump 阀冷废水排放泵	Q=20m³/h,H=40m,380V , 15kW	set 台	2		–	–	工作泵包括潜水泵、电机、管道、泵基、出口法兰、控制柜及电缆； Pump including submersible pump, motor, pipes, pump frame, outlet flange, control cabinet and cable.

编号 No.	名 称 Name	规 格 Parameters	单位 Unit	数量	材料 Material	单 重 Single	总 重 Total	参考图号及备注 Remark
						重量Weight		
20	Pipe support 管道支架		Set 套	4	Q235a			

Reference Drawings

Drwg. No.	Title

Revisions

	Name	Date	Notes

巴基斯坦默蒂亚里—拉合尔±660kV直流输电工程
±660kV HVDC Project from Matiari to Lahore in Pakistan

NATIONAL TRANSMISSION & DESPATCH COMPANY (NTDC) LIMITED PAKISTAN

CONTRACTOR 国家电网 STATE GRID 中国电力技术装备有限公司 CHINA ELECTRIC POWER EQUIPMENT AND TECHNOLOGY CO.,LTD.

SUBCONTRACTOR East China Electric Power Design Institute Co.,Ltd.

拉合尔±660kV换流站
±660kV Lahore Converter Station

设计阶段 PHASE: 施工图 Detail Design

M L H V D C - L C S - E C I - D D - S G - 0 4 0 6 - 0 0 3 A

	姓名 Name	日期 Date
设 计 Designed		
校 核 Checked		
审 核 Reviewed		
批 准 Approved		
比 例 Scale		图 号 DWG NO.

阀冷废水排放系统材料表
Bill Of Material For Valve cooling wastewater discharge system

30-B003701S-S0406-003

版 本 REV. A

297X420