卷册检索号 SEARCH NO. OF THE VOLUME
MLHVDC-LCS-ECI-DD-WF-0512 30-B003701S-S0512

第 1 页 PAGE 共 1 页 OF

图纸文件目录（首页）

CATALOG OF DRAWING DOCUMENTS (HEAD PAGE)

拉合尔±660kV换流站 工程 施工图 阶段
±660kV Lahore Converter Station PROJECT Detail Design DESIGN STAGE

消防 专业 第 05 卷 第 12 册
Fire Fighting SPECIALITY VOLUME BOOK

卷册名称 活动室室内移动式灭火器布置图
Volume name Activity House Fire Extinguisher Plane Arrangement Drawing

批 准 APPROVED BY	
审 核 REVIEWED BY	
设计/勘测 DESIGNED BY/ SURVEYED BY	
图 纸 1 张 DRAWING NOS.	打印件 1 本 PRINTED COPIES NOS.

序号 No.	图 号 DRAWING NO.	文 件 名 称 DOCUMENT TITLE	版本 EDITION	张 NOS.	本 NOS.	备注 REMARKS
1	30-B003701S-S0512-001	活动室 一层灭火器布置图及说明	A	1		
		Activity House The First Floor Fire Extinguisher Plane Arrangement				
		Drawing & Instructions				

注:

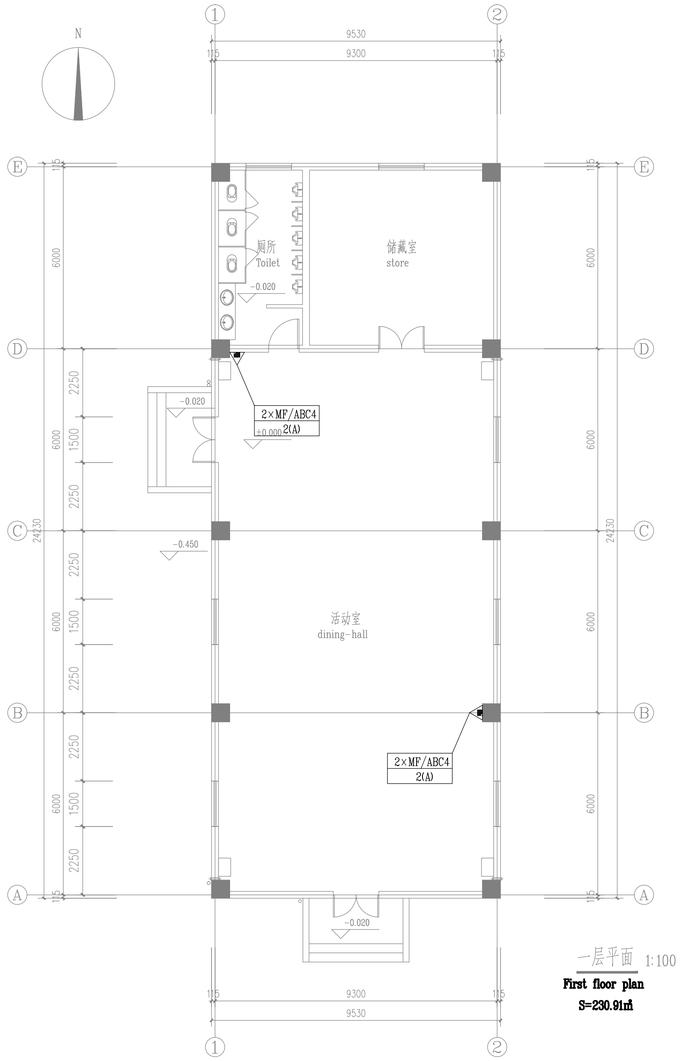

一层平面 1:100

First floor plan

S=230.91㎡

活动室 灭火器布置说明

Activity House Fire Extinguisher Arrangement Instructions

1. 本册图采用的主要设计验收规范

1. Design & Acceptance Standards and Codes:

1.1《建筑设计防火规范》GB50016-2014

1.1《Code for fire protection design of buildings》GB50016-2014

1.2《火力发电厂与变电站设计防火规范》GB50229-2006

1.2《Code for design of fire protection for fossil fuel power plants and substations》GB50229-2006

1.3 国家建筑标准设计《给水排水标准图集》

1.3 National building standard design "standard collective drawings of water supply and drainage(SCDWSD)"

2.主要设计概况

2. Design Overview

2.1 本册图的设计范围为站前区活动室灭火器布置图。

2.1 The design scope of this volume is mobile fire extinguishers for the activity house.

2.2 站前区活动室建筑面积230.91m^2，建筑体积约1154.5m^3，高度5.05m，耐火等级为二级。室外消防用水量为15L/s

2.2 The area of the activity house is 230.91m^2. The volume of the building is about 1154.5m^3. The height of the building is 5.05m. Fire resistance rating is class 2. The outdoor fire-fighting water consumption for this building is 15L/s at one time.

3. 移动式灭火器

3. Fire extinguisher:

3.1 建筑物内应根据《建筑灭火器配置设计规范》GB50140-2005要求配置移动式灭火器。本册建筑火灾以A类为主，火灾危险等级均为中级。

3.1 The building should follow the requirements of <Code for design of extinguisher distribution in buildings>(GB50140-2005), the firetype is class A, the dangerous grade are middle class.

3.2 灭火器配置详见图示，放置时可略微调整。但移动式灭火器应设于位置明显、便于取用且不影响安全疏散的位置。其它有关灭火器的摆放要求见GB50140-2005第5.1条。

3.2 Mobile fire extinguisher should set at the obvious place, convenient to use and no effection to safe evacuation, refer to GB50140-2005 5.1.

3.3 本图图中安装在消防柜中的灭火器不再表示(每个消防柜放置4kg手提式干粉磷酸铵盐灭火器2具)，仅表示额外需另增加的部分。额外增加的每2具手提式灭火器配1只移动式灭火器箱。

3.3 The fire extinguishers installed in the fire box are no longer indicated (each fire cabinet places 2 sets of 4kg portable dry powder ammonium phosphate fire extinguisher). Only the additional part is expressed. 2 additional portable fire extinguishers are put in 1 mobile fire extinguisher cabinet.

4. 图例(Graphic symbols):

磷酸铵盐干粉灭火器 Ammonium phosphate powder extinguisher

数量 Number

2×MF/ABC4 — 型号 Type

2(A) — 单具灭火级别 Single extinguishing level

Equips ammonium phosphate powder extinguishers(MF/ABC4),two in each box.

活动室 灭火器材料表

Activity House Bill of Materials for Fire Extinguisher

编号 No.	名称 Name	规格 Parameters	单位 Unit	数量 Quan	材料 Material	单重 Single 重量(公斤)	总重 Totoal Weight(Kg)	参考图号及备注 Remark
2	灭火器箱 Fire extinguisher cabinet		个 Set	2				
1	灭火器 Fire extinguisher	MF/ABC4磷酸铵盐灭火器 MF/ABC4 Ammonium phosphate fire extinguisher	个 Set	4				

Reference Drawings

Drwg. No.	Title

Revisions

Name	Date	Notes

巴基斯坦默蒂亚里—拉合尔±660kV直流输电工程

±660kV HVDC Project from Matiari to Lahore in Pakistan

NATIONAL TRANSMISSION & DESPATCH COMPANY (NTDC) LIMITED PAKISTAN

CONTRACTOR 国家电网 STATE GRID 中国电力技术装备有限公司 CHINA ELECTRIC POWER EQUIPMENT AND TECHNOLOGY CO.,LTD.

SUBCONTRACTOR East China Electric Power Design Institute Co.,Ltd.

拉合尔±660kV换流站

±660kV Lahore Converter Station

设计阶段 PHASE: 施工图 Detail Design

M L H V D C - L C S - E C I - D D - W F - 0 5 1 2 - 0 0 1 A

	姓名 Name	日期 Date
设计 Designed	朱象跃	2018.01.11
校核 Checked	张科杰	2018.01.11
审核 Reviewed	陈祥可 陈祥	2018.01.11
批准 Approved	陈祥可	2018.01.11

活动室

Activity House

一层灭火器布置图及说明

The First Floor Fire Extinguisher Plane Arrangement Drawing & Instructions

比例 Scale: 1:100

图号 DWG NO.: 30-B003701S-S0512-001

版本 REV.: A

594X841